




LOCKOUT TAGOUT CATALOGUE

www.lukkosafety.com

LIST OF INDUSTRIES WHERE LOTO IS APPLICABLE :

- ▶ Automobile Plants
- ▶ Manufacturing Units
- ▶ Power Generation/Distribution Plants
- ▶ Alloy Plants
- ▶ Maintenance
- ▶ Refinery Plants
- ▶ Cement Plants
- ▶ Nuclear Power Plants
- ▶ Steel Plants
- ▶ Dairy Plants
- ▶ Oil & Gas Refineries
- ▶ Etc...
- ▶ Gases Plants
- ▶ Pharmaceutical Plants
- ▶ Hydro Electricity Plants

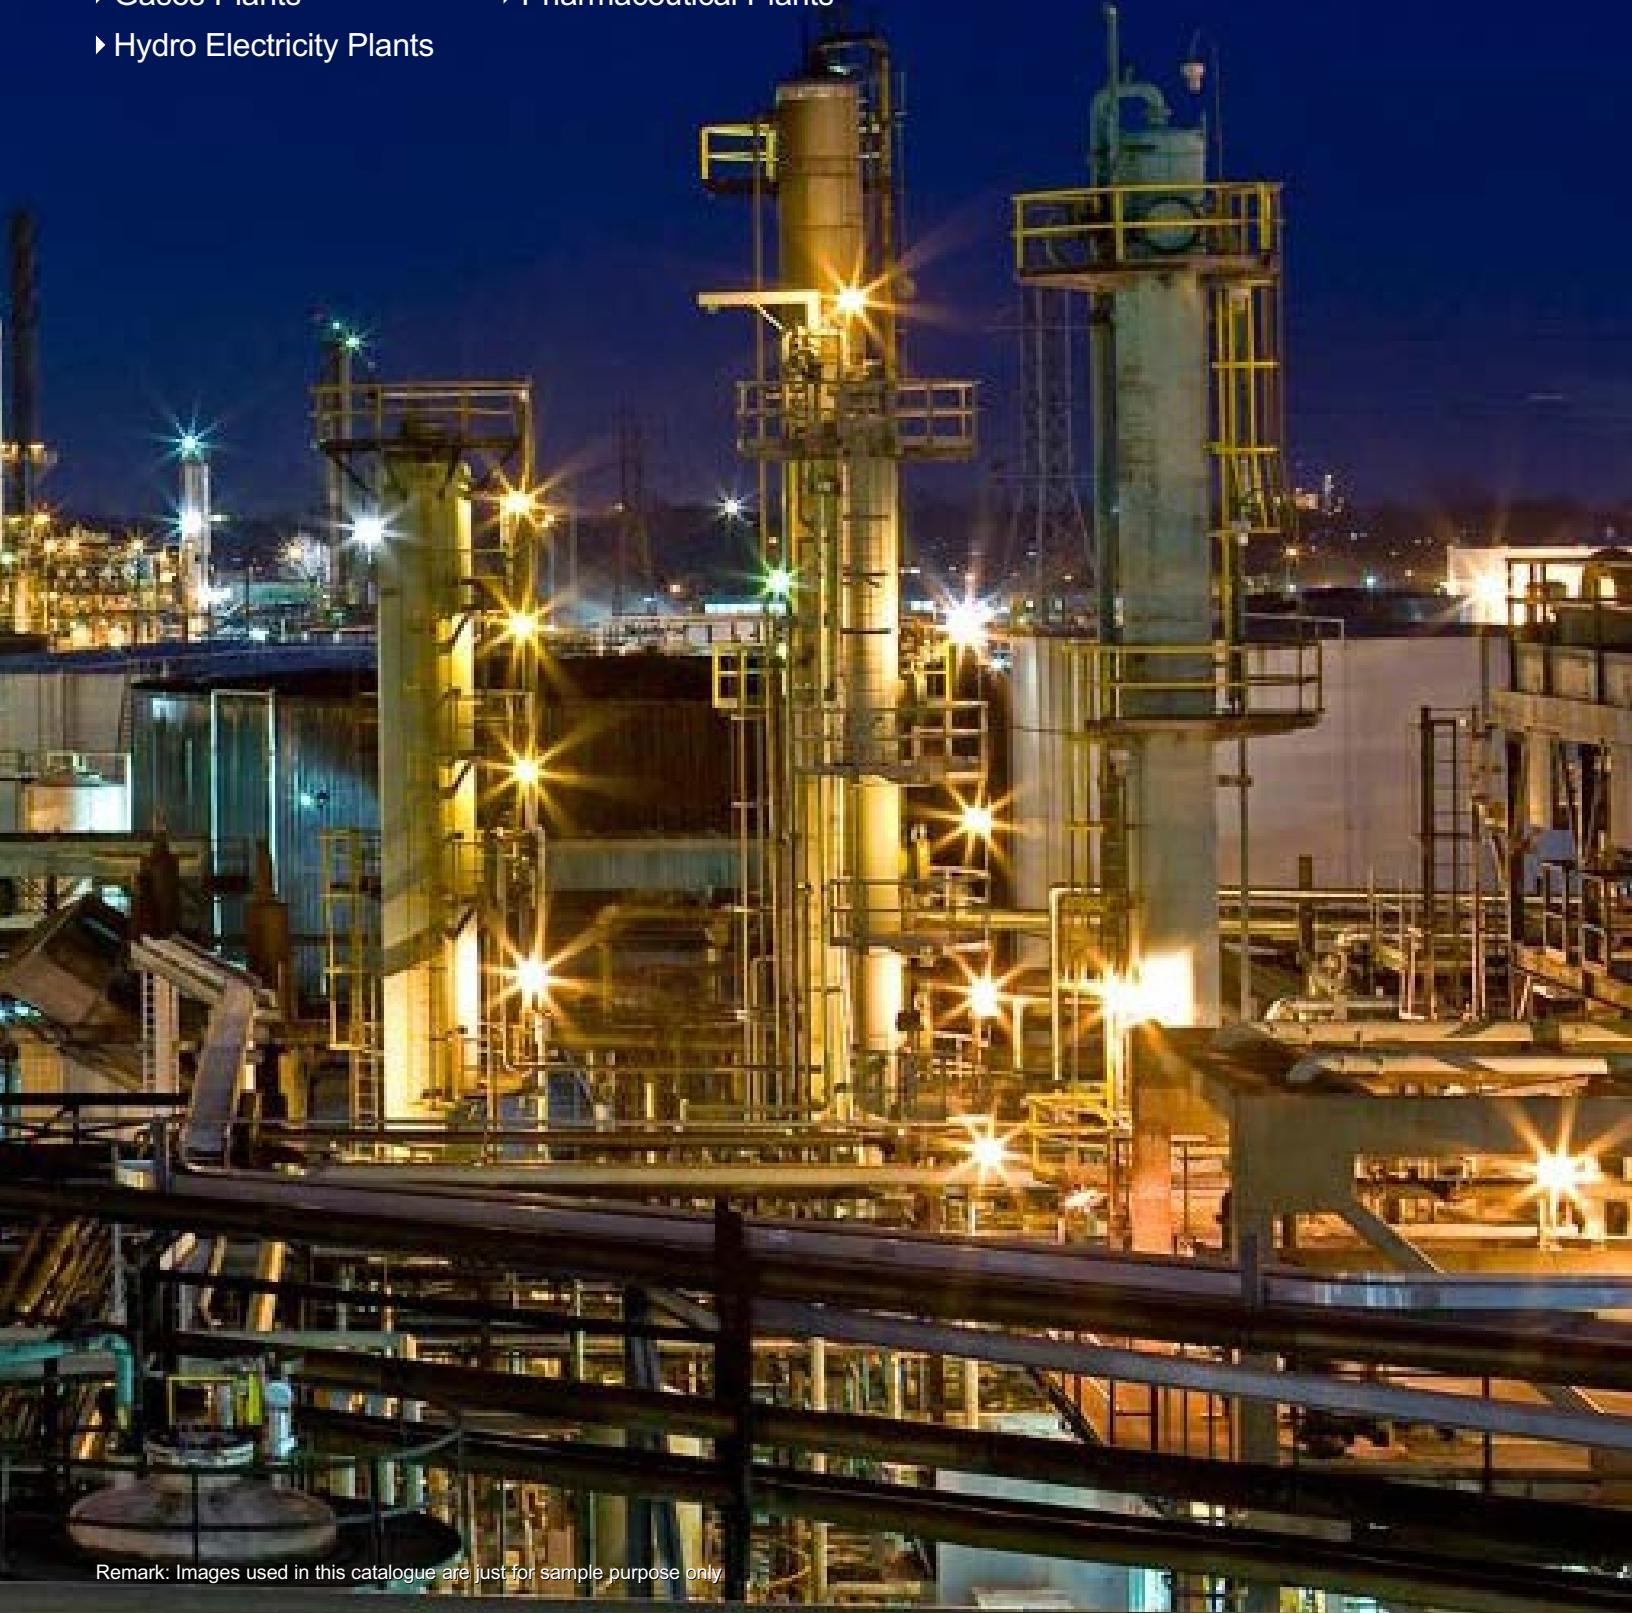

CONTENTS

| | |
|-------------------------------|-------|
| Certifications | 3 |
| Manufacturing Unit | 4 |
| Why Lockout / Tagout? | 5-6 |
| Lockout Safety Hasps | 7-13 |
| Circuit Breaker Lockout | 14-20 |
| Valve Lockouts | 21-24 |
| Lockout Padlocks | 25-26 |
| LOTO Tags | 27-29 |
| Cable Lockout | 30-32 |
| Electrical Panel Lockout | 33-34 |
| Emergency Push Button Lockout | 34 |
| Electrical Plug Lockout | 35-36 |
| Cylinder & Pneumatic Lockout | 37-38 |
| LOTO Station / Box / Cabinets | 39-41 |
| LOTO Kits | 42 |

CONTENTS & CERTIFICATIONS

CERTIFICATIONS






WHY LOCKOUT / TAGOUT?

Employees servicing or maintaining machines or equipment may be exposed to serious physical harm or death if hazardous energy is not properly controlled. Craft workers, machine operators, and labourers are among the 3 million workers who service equipment and face the greatest risk. Compliance with the lockout/tagout standard prevents an estimated 120 fatalities and 50,000 injuries each year. Workers injured on the job from exposure to hazardous energy lose an average of 24 workdays for recuperation.

- Lockout/tagout standard establishes the employer's responsibility to protect employees from hazardous energy sources on machines/equipment during Service/maintenance.
- Standard provides each employer the flexibility to develop an energy control program suited to the needs of the particular workplace and the types of machines /equipment being maintained/Serviced.
- It's generally done by affixing the appropriate lockout or tagout devices to energy-isolating devices and by de-energizing machines and equipment.



SIX STEPS PROCESS OF LOCKOUT/TAGOUT:

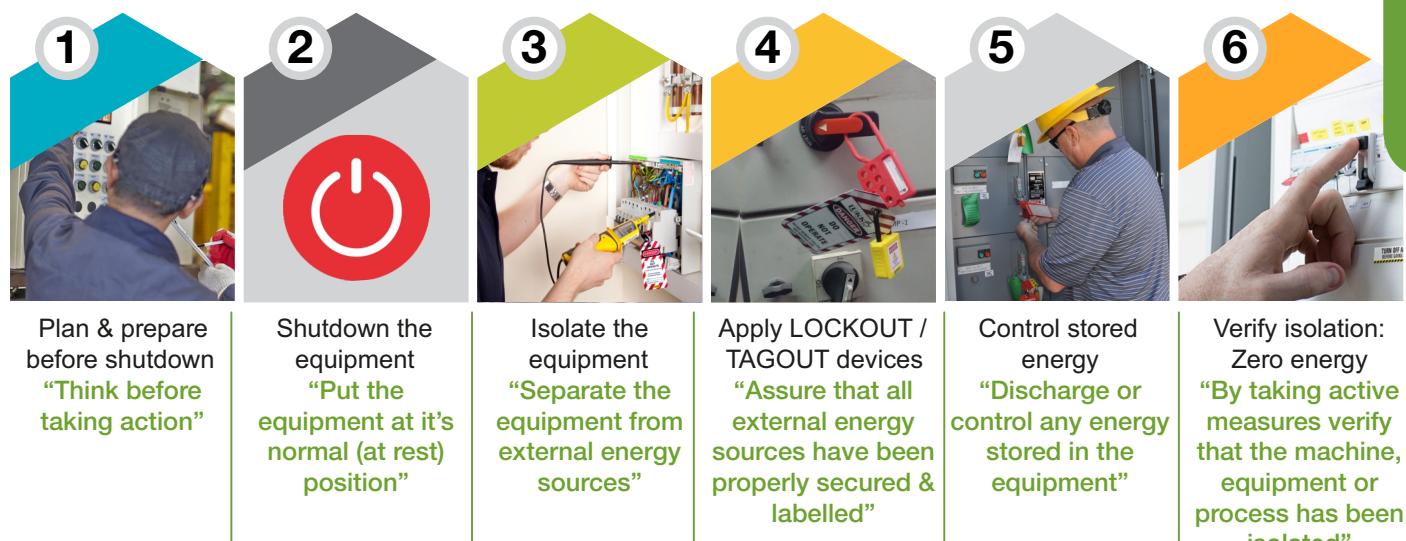

To provide training, step by step in an interacting way so that participants will be better prepared to implement requirement of LOTO Standards on all applicable source of energy whenever they are involved in routine shutdown, breakdown and maintenance activities so that any potential for self or peers injury, equipment damage, environmental releases are eliminated.

OSHA's Volume 29 Code of Federal Regulation (CFR) 1910.147 standard addresses the control of hazardous energy when servicing or maintaining equipment.

- This standard covers the servicing and maintenance of machines and equipment in which the unexpected energization or start up of the machines or equipment, or release of stored energy could cause injury to employees. This standard establishes minimum performance requirements for the control of such hazardous energy.
- This standard applies to the control of energy during servicing and / or maintenance of machines and equipment.
- This section requires employers to establish a program and utilize procedures for affixing appropriate lockout devices or tagout devices to energy isolating devices, and to otherwise disable machines or equipment to prevent unexpected energization, start-up or release of stored energy in order to prevent injury to employees.



1910.147(c) OSHA Energy Control Policy; Synopsis of Requirements

An energy control policy must be documented and at a minimum should cover the following

aspects of the program:

- Purpose and scope of the program
- Personnel authorized to perform LOTO
- Enforcement policy
- Training methods
- Group lockout procedures

- Shift transfer procedures
- Lock removal procedures
- Method for auditing & updating procedures
- Coordination with outside contractors




1910.147(c)(4) Energy Control Procedures; Synopsis of Requirements

- Procedures must be documented and must identify the equipment covered.
- A separate procedure must be created for each piece of equipment to be locked out. There are exceptions where multiple machines may be grouped under a single procedure.
- The procedure must include specific steps for shutting down, isolating, blocking and securing equipment to control hazardous energy.
- Specific steps for the placement, removal and transfer of Lockout Tagout devices should also be included.
- The employer shall conduct and certify periodic inspections at least annually.

1910.147(c)(5)(ii)(B) Standardized

Lockout devices must:

- Be provided by the employer, standardized by size, shape or colour.
- Be distinguishable from locks used for other purposes. Lockout locks should only be used for lockout!
- Identify the individual who applied the lock (both tags and lock labels are acceptable for this purpose).
- Be durable, strong enough to prevent removal except by using excessive force.
- Remain under the exclusive control of the individual who attached them of time that exposure is expected.




1910.147(c)(5)(ii)(B) Standardized

Lockout and tagout devices shall be standardized within the facility in at least one of the following criteria: Colour; shape; or size; and additionally, in the case of tagout devices, print and format shall be standardized.


1910.147(c)(5)(ii)(A) Durable

Lockout and tagout devices shall be capable of withstanding the environment to which they are exposed for the maximum period of time that exposure is expected.

ISOLATION FROM HAZARDOUS ENERGY

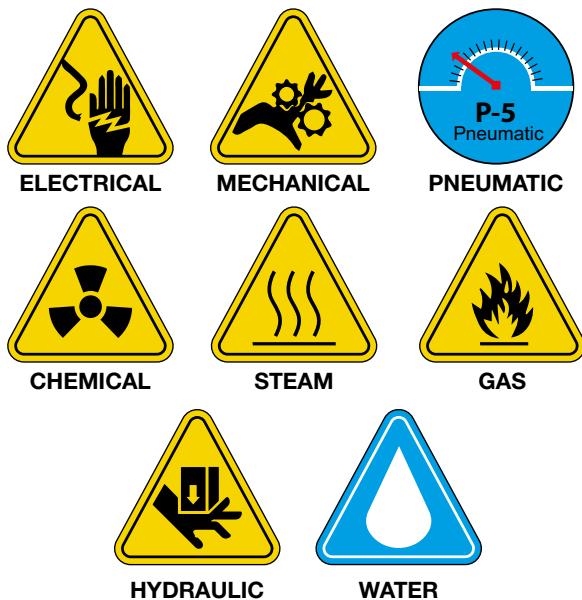

CORE VALUES

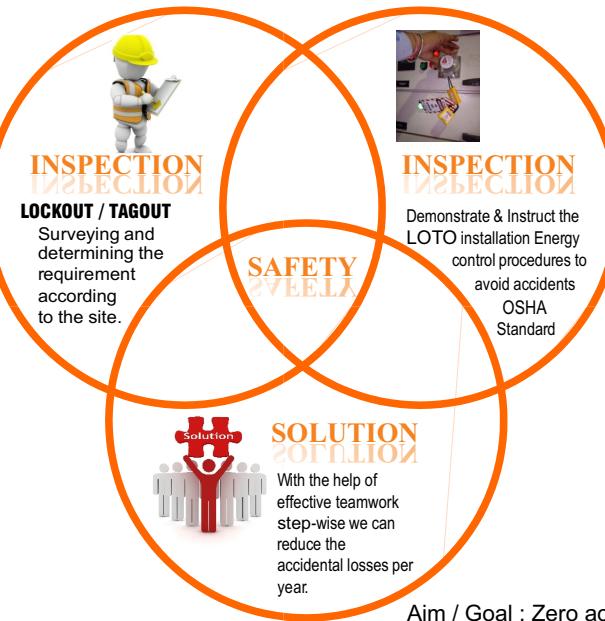

Vinyl Coated LOTO Hasp

- Material:** MS + chrome coating + vinyl coated handle
- Complete length:** Small 114mm (62mm metallic + 52mm vinyl coated part) / Premier 128.5mm
- Width:** 40.5mm
- Thickness:** 2mm metallic part and 4.1mm coated part.
- Jaw Size:** 25mm Or 38/39mm
- Accepts shackle maximum up to : 9mm
- Locking holes:** 6 / 8 / 10 / 12 numbers to provide group isolation
- Two extra small holes (3 to 3.5mm) provided at the edges to hang the tags with the help of a cable tie.
- Advantage:** Used to lockout electrical as well as mechanical devices while perform servicing, maintenance or cleaning activities.



LS-H24

LS-H28



LS-H34

LS-H33

LS-H32

Vinyl Moulded LOTO Hasp (with Hooks)

- Material:** MS + chrome coating + vinyl coated handle
- Complete length:** 114mm (62mm metallic + 52mm vinyl coated part) / 129mm
- Width:** 40.5mm
- Thickness:** 2mm metallic part and 4.1mm coated part.
- Jaw Size:** Available in two different jaw dia 25mm Or 38/39mm
- Accepts shackle maximum up to:** 9mm
- Locking holes:** 6 numbers to provide group isolation
- Two extra small holes provided at the edges to hang the tags with the help of a cable tie.
- Advantage:** Used to lockout electrical as well as mechanical devices while perform servicing, maintenance or cleaning activities, hooks are provided at one / both sides to improve grip and protection.



LS-H37

LS-H38

Lockout Hasp (Powder Coated)

- Material:** MS + fully powder coated body
- Complete length:** 25mm jaw: 114mm (6 hole) / 135.7mm (8 hole) / 151.7mm (10 hole) / 166mm (12 hole)
- Width:** 39mm, thickness: 2mm
- Jaw Size:** Available in two different jaw dia 25 mm Or 38/39 mm
- Accepts shackle maximum up to:** 9.5mm
- Locking holes:** 6 / 8 / 10 / 12 numbers to provide group isolation
- Weight:** 25mm jaw: 77.5gm (6 hole) / 112.5gm (12 hole)
- Two extra small holes provided at the edges to hang the tags with the help of a cable tie.
- Advantage:** Used to lockout electrical as well as mechanical devices while perform servicing, maintenance or cleaning activities

| Item Code | Description | Holes | Weight |
|-----------|-----------------|-------|---------|
| LS-H39 | Jaw Dia 25mm | 6 | 77.5gm |
| LS-H40 | Jaw Dia 38/39mm | 6 | 86.5gm |
| LS-H41 | Jaw Dia 25mm | 8 | 92.5gm |
| LS-H42 | Jaw Dia 25mm | 10 | 102.5gm |
| LS-H43 | Jaw dia 25mm | 12 | 112.5gm |



LS-H39



LS-H43



LS-H40

Stainless steel LOTO Hasp

- Material:** Mild Stainless Steel LOTO hasp + Electroplated coating
- Complete length:** 114mm
- Jaw Size:** 25mm Or 38/39mm
- Accepts shackle maximum up to:** 9mm
- Locking holes:** 6 / 8 / 10 / 12 numbers to provide group isolation
- Accepts shackle maximum up to:** 10mm
- Two extra small holes provided at the edges to hang the tags with the help of a cable tie.
- Advantage:** Used to lockout electrical as well as mechanical devices while perform servicing, maintenance or cleaning activities.

| Item Code | Description | Weight |
|-----------|----------------|--------|
| LS-H44 | Jaw dia 25mm | 70gm |
| LS-H45 | Jaw dia 38/39m | 80gm |



LS-H44



LOTO Metallic Hasp

- Material:** CI + chrome coating
- Accepts shackle up to:** 8.5mm
- Locking holes:** 3 holes + 1 big slot
- Jaw size:** 30mm / 28.7mm
- Locking Slot size:** 30.5mm X 9.2mm
- Complete length:** 113.7mm
- Shackle thickness:** 5mm
- Body Width at:** Top (43mm) Bottom (46mm)
- Weight:** 112gm
- Warning / Danger / Caution label for the recognition purpose

| Item Code | Description |
|-----------|-------------------------------------|
| LS-H46 | Polished shine proof chrome coating |
| LS-H47 | Regular chrome coating |



LS-H46

TAGO Labelled Lockout Hasp

- Material:** Aluminium + Danger / caution label at front / back side for better identification.
- Accepts shackle maximum up to:** 7.5mm
- Locking holes:** 6 / 8 / 10 / 12 numbers
- Jaw size:** 35/27mm
- Complete length:** 184mm
- Width:** 77.7mm
- Weight:** 120gm
- Thickness:** 2mm
- Advantage:** Additional authorized employees can also affix their respective padlocks in the device to fulfil group isolation necessities hence this device assist in the servicing operation, it allows the user to write their respective details in the provided captions, hence it doesn't required to attach Tag along with the device.
- Hasp + Standard tag

| Item Code | Holes |
|-----------|-------|
| LS-H48 | 6 |
| LS-H49 | 8 |
| LS-H50 | 10 |
| LS-H51 | 12 |

Products Colour



LS-H50



TAGO Labelled Lockout Hasp

- Material:** MS + fully powder coated body + Danger / caution label at front / back side for better identification.
- Accepts shackle maximum up to:** 7.5mm
- Locking holes:** 6 / 8 / 10 / 12 numbers
- Jaw size:** 35/27mm
- Complete length:** 184mm, **Width:** 77.7mm
- Weight:** 191gm
- Thickness:** 1mm
- Advantage:**
 - Additional authorized employees can also affix their respective padlocks in the device to fulfil group isolation necessities hence this device assist in the servicing operation, it allows the user to write their respective details in the provided captions, hence it doesn't required to attach Tag along with the device.
- Hasp + Standard tag

| Item Code | Holes |
|-----------|-------|
| LS-H52 | 6 |
| LS-H53 | 8 |
| LS-H54 | 10 |
| LS-H55 | 12 |

Available Colour



LS-H54

Metallic Multifunction Lockout Hasp

- Material :** MS + chrome coated body + covered by ABS
- Accepts shackle maximum up to :** 8mm
- Locking holes:** 6 numbers
- Jaw size :** 51.4mm / 34.6mm
- Complete length :** 150mm
- Width :** 57mm
- Weight :** 118 gram
- Advantage :** - This device can be used to lockout huge range of industrial plant equipments either electrical, mechanical and even forklift steering wheels, can be used alone as a lockout hasp or with the provision of one sided looped insulated cable it can be used as a cable lockout.
- Upper cover made it electrically safe and corrosion resistant.

| Item Code | Description |
|-----------|-------------|
| LS-H56 | Hasp |
| LS-H57 | Hasp |
| LS-H58 | Hasp |
| LS-H59 | Hasp |



LS-H58



LS-H56



LS-H57



LS-H59

Aluminium Lockout Hasp

- Material:** zinc aluminium alloy material With vinyl coated handle
- Complete length:** 107mm (Small) / 120mm (Premier)
- Jaw Size:** Available in two different jaw dia 25mm Or 38mm
- Accepts shackle maximum up to:** 8mm
- Shackle thickness:** 4mm / 5mm and gradually increase up to 7mm
- Locking holes:** 6 numbers to provide group isolation
- Weight:** 55gm / 69.5gm
- Advantage:** Rust resistant and comparatively lighter in weight.

| Item Code | Description | Color |
|-----------|-----------------|--------------------------|
| LS-H60 | Jaw Dia 25mm | Red, Yellow, Green, Blue |
| LS-H61 | Jaw Dia 38/39mm | Red, Yellow, Green, Blue |



Double - Jaw Lockout Hasp

- Material :** MS + fully powder coated body
- Complete length :**
- Jaw Size :** Available in two different jaw dia 25 mm Or 38/39 mm
- Complete Length :** LS-H62 177.8mm, LS-H62A 205.74mm
LS-H62B 190.5mm
- Accepts shackle maximum up to :** 9mm
- Locking holes :** 6 numbers to provide group isolation
- Two extra small holes provided at the edges (both sides) to hang the tags with the help of a cable tie.
- Advantage:**
- Used to lockout electrical as well as mechanical devices while performing servicing, maintenance or cleaning activities.
- Corrosion resistant , High temperature compatible
- It can lockout nearby two points by above and lower sides at the same time.

| Item Code | Description | Weight |
|-----------|---|---------|
| LS-H62 | Jaw Dia 25mm – Both ends | 154gm |
| LS-H62A | Jaw Dia 38/39mm – Both ends | 173gm |
| LS-H62B | Jaw Dia (one side 25mm + 38/39mm other side) | 163.5gm |

LS-H61 LS-H60



LS-H62 LS-H62A LS-H62B

Non – Conductive Hasp (4/8 Hole)

- Material:** High quality Polypropylene Copolymer (PPCP)
- Complete length (A):** 126mm
- Body Width:** 54mm (8hole) / 38mm (4hole)
- Jaw Size (B):** 63.5 / 32.5mm
- Locking holes:** 8 / 4 numbers
- Accepts shackle maximum up to :** 9mm
- Weight:** 18.5 / 15.5 gm
- Shackle thickness:** 2.7mm/5.4mm upper thin part, 6.10mm lower thick part
- Advantage:** Light weighted device, preferably used to lockout electrical devices, Shock proof, highly durable, chemical resistant and break free.

| Item Code | Description | Color |
|-----------|-------------------|--------------------------|
| LS-H63 | 8 hole Nylon Hasp | Red, Yellow, Green, Blue |
| LS-H64 | 4 hole Nylon Hasp | Red, Yellow, Green, Blue |



LS-H64



LS-H63

Non – Conductive Hasp (6 hole)

- Material:** High quality Polypropylene Copolymer (PPCP)
- Complete length:** 175mm
- Jaw Size:** 80mm / 33.6mm
- Locking holes:** 6 numbers
- Accepts shackle maximum up to:** 8mm
- Weight:** 25gm
- Shackle thickness:** 4.5mm
- Advantage:** Light weighted device, preferably used to lockout electrical devices, shock proof, highly durable, chemical resistant and break free.

| Item Code | Description |
|-----------|-------------------|
| LS-H65 | 6 hole Nylon Hasp |



De - Electric Lockout Hasp (Slider Type)

- Material:** Nylon + ABS
- Complete length:** 112.2mm
- Base body size:** length 64.6mm X width (Centre) 55.5mm
- Jaw Size:**
 - LS-H66 - 42mm / 21.5mm
 - LS-H67 - 45mm / 25.6mm
 - Locking holes - 4 numbers
- Accepts shackle maximum up to:** 8mm
- Weight:** 35gm / 32gm
- Shackle thickness:** 3mm / 6mm
- Advantage:** Light weighted device, preferably used to lockout electrical devices, shock proof, highly durable, chemical resistant and break free, it's thin shackle (3mm) allows to lockout difficult and hard to reach points.

| Item Code | Description |
|-----------|-------------------------------------|
| LS-H66 | 4 hole slider Hasp with 6mm shackle |
| LS-H67 | 4 hole slider Hasp with 3mm shackle |



Flexible LOTO Safety Hasp

- Material:** ABS
- Complete length:** 149mm
- Jaw Size:** 20mm
- Accepts shackle maximum up to:** 8mm
- Locking holes:** 6 numbers
- Weight:** 36gm
- Punched rivet is corrosion resistant.
- Advantage:** Used to lockout electrical as well as mechanical devices while perform servicing, maintenance or cleaning activities, flexible in nature hence can be used as a hasp as well as cable lockout along with the insulated cable.

| Item Code | Description |
|-----------|---------------------------|
| LS-H68 | Flexible LOTO safety Hasp |



LS-H68

Dielectric Double - Jaw Lockout Hasp

- Material:** ABS
- Complete length:** 142.5mm
- Width:** 39mm
- Jaw Size:** two sides different jaw dia 26/25mm and 38/39mm respectively
- Accepts shackle maximum up to:** 8.5mm
- Locking holes:** 8 numbers to provide group isolation
- Weight:** 21gm
- Two extra small holes provided at the edges (both sides) to hang the tags with the help of a cable tie.
- Advantage:** Used to lockout electrical as well as mechanical devices while perform servicing, maintenance or cleaning activities, it can lockout nearby two points by above and lower sides at the same time.



Item Code Description

| | |
|--------|--|
| LS-H69 | Lockout Hasp, SMALL + PREMIER respectively |
|--------|--|



LS-H69

Non – Conductive Hasp (6 / 12 hole)

- Material:** High quality Polypropylene Copolymer (PPCP)
- Complete length:** 182mm
- Jaw Size:** 83 / 25 mm (centre to centre)
- Locking holes:** 6 /12 numbers
- Accepts shackle maximum up to:** 8.50mm
- Weight:** 32 gm (12 hole) / 25.6gm (6 hole)
- Shackle thickness:** 5.80mm upper thin part, 5.95mm lower thick part
- Advantage:** Light weighted device, preferably used to lockout electrical devices, shock proof, highly durable, chemical resistant and break free.



LS-H70

Item Code Description

| | |
|--------|--------------------|
| LS-H70 | 6 hole Nylon Hasp |
| LS-H71 | 12 hole Nylon Hasp |



LS-H71

Metallic Multi Function Lockout Hasp Kit
(OSHA Padlock - Nylon)

Safety Lockout HASPS are used when you wish to use multiple padlocks to isolate one energy source and the primary lockout device does not have enough integral lockout points.

Item Code Description

Weight

Hasp Kit Material

| | | |
|--------|--|--------|
| LS-H72 | 1 Metallic Multifunction Lockout Hasp + 6 Nylon Shackle LOTO Padlock | 593 gm |
|--------|--|--------|

Available Colour



LS-H72



Vinyl Moulded Lockout Hasp Kit (OSHA Padlock - Nylon)

| Item Code | Description | Weight |
|--------------------------|--|--------|
| Hasp Kit Material | | |
| LS-H73 | 1 Metallic Multifunction Lockout Hasp + 6 Nylon Shackle LOTO Padlock | 558 gm |

Available Colour 



LS-H73

Powder Coated Lockout Hasp Kit (OSHA Padlock - Metallic / Nylon)

| Item Code | Description | Weight |
|--------------------------|---|--------|
| Hasp Kit Material | | |
| LS-H74 | 4 Powder Coated Lockout Hasp + 4 Nylon Shackle LOTO Padlock + 4 Metallic Shackle LOTO Padlock | 859 gm |


Padlock Hasp 



LS-H74

Lockout Hasp Station

| Item Code | Description | Weight |
|-----------|---|---|
| LS-H75 | Lockout HASP Station: Size : 8" (L) X 20" (W) |  470 gm |
| LS-H76 | Lockout HASP Station with material - 20 Hasp |  2.2 Kg |
| LS-H77 | Lockout HASP Station: Size : 13" (L) X 21" (W) |  855 gm |
| LS-H78 | Lockout HASP Station with material - 40 Hasp |  4.26 Kg |

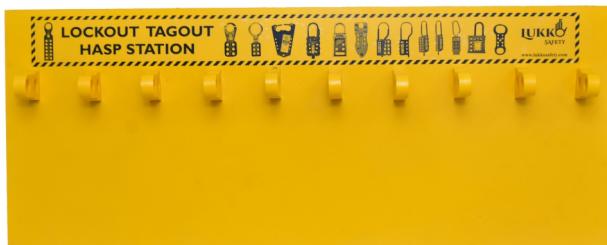

LS-H75



LS-H76



LS-H77



LS-H78

Small steel safety Lockout Hasp

- **Material :** Steel body and hasp
- **Accepts shackle up to :** 8.5mm
- **Locking holes :** 1 big slot
- **Jaw size :** 25mm
- **Complete length :** 85.10mm
- **Shackle thickness :** 5mm
- **Body Width at top :** 59mm
- Warning / Danger / Caution label for the recognition purpose
- **Weight :** 106gm
- **Color :** Silver



LS-H75

| Item Code | Description | Weight |
|-----------|------------------------------------|--------|
| LS-H75 | STEEL BODY HASP WITH SILVER COATED | 106gm |

Miniature Circuit Breaker Lockout PIN IN / OUT / WIDE


- Material :** Nylon Plastic with metal pins
- Locking Holes :** 01
- Accepts shackle up to :** 7.4mm
- Size :**
 - Closed full length : 42mm to 43.40mm
 - Pins pressed outward up to:



LS-BR9

LS-BR10

LS-BR11

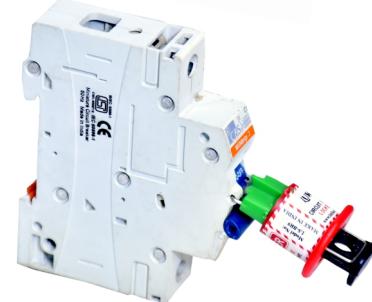

| Pin-in | Pin-out | Pin-wide |
|----------------------------------|------------------------------|----------------------------------|
| Pins inside bended width 8 mm | Pins outward width 7.8 mm | Broad pins outward width 9 mm |

- No tools required for installation.
- Installation method: Press lower black part to expand front pins, fix the pins on side holes of Circuit Breaker and release. Now place the padlock and tag for lockout.
- Corrosion resistant metallic pins.
- Application: This lockout device can help to prevent un-intended energization of electrical energy sources. Suitable for Single / Double / three / four pole operating handle circuit breaker.

| Item Code | Description | Weight |
|-----------|-------------------------|---------|
| LS-BR9 | Pin In | 19.5 gm |
| LS-BR10 | Pin Out | 19.5 gm |
| LS-BR11 | Pin Wide | 21 gm |
| LS-BR12 | Pin In / Out / Wide set | 20 gm |




Miniature Circuit Breaker Lockout - Tie Bar

- Material :** ABS + Metal screw
- Locking holes :** 01
- Accepts shackle up to : 8/ 8.6mm
- Non foldable screw: length 11.5mm, thickness 4.9mm
- Foldable screw: length 54mm, foldable length 30mm, thickness 3.7mm
- Size :** Height 47 / 57.5mm, Width 9.6 / 13.8mm
- MCB operator locking curve 8 / 8.5 mm
- Circuit Breaker Lockout is used to isolate the electrical energy to procure the electrical hazardous situation, applicable only when the energy source is in switched OFF situation.
- Suitable to lockout single / double / three pole operating handle circuit breaker.

| Item Code | Description | Weight |
|-----------|-------------|---------|
| LS-BR13 | TIE Bar | 19.5 gm |



LS-BR13

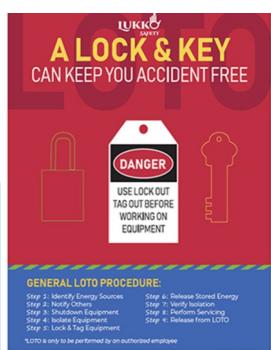

Universal Circuit Breaker Lockout

- Material :** ABS + Metal screw
- Locking holes :** 01
- Accepts shackle up to : 8.5mm
- Weight :** 12 / 19 gm
- Non foldable screw: length 11.5mm, thickness 4.9mm
- Foldable screw: length 54mm, foldable length 30mm, thickness 3.7mm
- Size :** Height 55.25mm, Width 18.33mm
- MCB operator locking curve 10.4 mm
- Universal Circuit Breaker Lockout is used to isolate the electrical energy to procure the electrical hazardous situation, applicable only when the energy source is in switched OFF position.
- Rust resistant screws.
- Suitable to lockout single / double / three pole operating handle circuit breaker.
- Nose is used to fill the gap between operating handle and fixed point in OFF position for better grip and proper lockout.



Item Code Description

| | | |
|---------|---|--|
| LS-BR14 | Normal screw + nose - X type | |
| LS-BR15 | Normal screw / without nose - X1 type | |
| LS-BR16 | Foldable screw + nose - X2 type | |
| LS-BR17 | Foldable screw / without nose - X3 type | |
| LS-BR18 | all four type set | |




Miniature Circuit Breaker Lockout (Curvature Shape)

- Material :** ABS + Metal screw
- Locking holes :** 01
- Accepts shackle up to : 8mm
- Weight :** 6.5 gm
- Non foldable screw: length 11.4mm, thickness 4.9mm
- Size :** Height 47mm, Width 9.6mm
- MCB operator locking curve 8 mm
- Circuit Breaker Lockout is used to isolate the electrical energy to procure the electrical hazardous situation, applicable only when the energy source is in switched OFF situation.
- Suitable to lockout single / double / three pole operating handle circuit breaker.



Item Code Description

| Item Code | Description | Weight |
|-----------|--------------------------------|---------|
| LS-BR19 | Normal screw, Small, curvature | 6.5 gm |
| LS-BR20 | Foldable screw, Big, curvature | 18.5 gm |
| LS-BR21 | Small + Big Set | 25 gm |

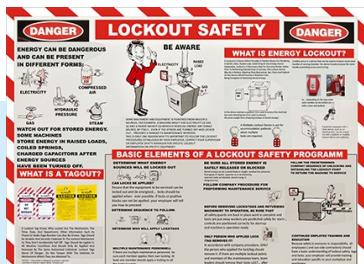

Circuit Breaker Lockout - Blue

- Material :** ABS + Metal screw
- Locking Holes :** 01
- Accepts shackle up to : 8 / 9 mm
- Non foldable screw:** length 19.4mm, thickness 3.8mm
- Foldable Screw:** length 54mm, foldable length 30mm, thickness 3.7mm
- MCB operator locking curve 11.5 mm
- Used to isolate the MCB hence prevent accidental switching ON the device, can be installed only in switched OFF position.
- Rust resistant screws.
- Suitable to lockout single / double / three / four pole operating handle circuit breaker.



LS-BR22

LS-BR22N

LS-BR23

LS-BR23N

NOSE

| Item Code | Description | Size (mm) | Weight |
|-----------|------------------------------------|-------------|---------|
| LS-BR22 | Small : Without nose, normal screw | 14.5 x 22.7 | 14 gm |
| LS-BR22N | Small : With nose, normal screw | 14.5 x 22.7 | 14.2 gm |
| LS-BR23 | Big : without nose, foldable screw | 61 x 23.3 | 23 gm |
| LS-BR23N | Big : without nose, foldable screw | 61 x 23.3 | 15.5 gm |

Available Colour



Circuit Breaker Lockout - Green

- Material :** ABS + Metal screw
- Locking holes :** 01
- Accepts shackle up to : 8mm
- Non foldable screw: length 11.4mm, thickness 4.9mm
- Size :** 42.5 mm (Height) and 10.06 mm (Width)
- MCB operator locking curve 4.4mm
- The Lockout Safety Miniature Circuit Breaker Lockout has been designed to lockout the electrical energy sources, circuit breakers and therefore prevent accidental switch ON.
- Front sharp edges in the device allows to lockout MCB's in which no gap is available on lower side while operating like SIEMENS.

| Item Code | Description | Weight |
|-----------|-----------------------|--------|
| LS-BR24 | Tiny pattern | 6.5 gm |
| LS-BR25 | Tiny pattern Set of 2 | 13 gm |



LS-BR24



Dual Sided Circuit Breaker Lockout

- Material :** ABS + Metal screw
- Accepts shackle up to : 8mm / **Locking holes :** 01
- One side small normal screw: length 11.4mm, thickness 4.9mm
- Other side large normal screw: length 19.4mm, thickness 3.8mm
- Size :** 57 mm (Height) and 12 mm (Width)
- MCB operator locking curve : at one side 8.5mm / another wide side 12.32mm
- Device is ideal to use on multiple MCB's and main switches.
- Two opposite sides are having two different clearances that can lockout several sizes of circuit breaker operating handle.



LS-BR26

| Item Code | Description | Weight |
|-----------|-------------------------|--------|
| LS-BR26 | Two sides, Normal screw | 18 gm |

Group Circuit Breaker Lockout

- **Material :** ABS
- **Locking holes :** 07 on both base
- Accepts shackle up to : 7.6 / 8.5mm (oval shape) space left above rod for lockout.
- **Size :** Sticky base : Length 100.86mm X Width 19.85mm X Height 26.80mm
- Barrier rod length : 195.82mm
- Teeth on base: length 2.33mm, width 2.86mm
- Sticky Base with spikes + 2 rod to fix
- Number of teeth on base : 7 both side
- Two Sticky base along with high quality 3M adhesive to fix it rigidly on two sides near circuit breaker along with two rod RED/GREEN with holes at the bottom.
- Device is one time use and can lockout multiple circuit breakers at a time within certain length.
- RED & Green rods provided to select between LOCKED OFF and LOCKED ON position.

| Item Code | Description | Weight |
|-----------|--------------|--------|
| LS-BR27 | CBL, Per set | 60 gm |



Large Handle Circuit Breaker Lockout

- **Material:** ABS + anti corrosive screw for industrial and harsh application.
- Accepts shackle up to : 9mm
- Full Length : 84.25mm (without back locking portion)
- Rectangular slot (teeth part) : 77mm X 20.6mm
- Rectangular part outward **size** : 93.5mm X 48mm
- Teeth : 13 number, thickness 3mm, edge to edge gap 5.5mm
- **Locking holes:** Totally twelve holes at the upper round and should adjust and meet three holes at the lower so that three authorized person can lockout the particular device at a time, then tagout the along with the device for recognition purpose.
- Large handle circuit breaker lockout device require tool with normal screw / No extra tool needed in foldable screw / round back hence it can be quickly and easily installed.
- Advantage: It's special designed to lockout wide range of oversized three phase circuit breakers, the available teeth in the device is used to grip the actuator piker, so that it can not slip out after lockout.

| Item Code | Description | Weight |
|-----------|---------------------------------|--------|
| LS-BR28 | Normal screw | 35 gm |
| LS-BR29 | Foldable screw | 40 gm |
| LS-BR30 | Round back for screw tightening | 70 gm |



LS-BR28 LS-BR30





Circuit Breaker/ Fuse Safety Lockout Kit Normal Screw 1



Snap - On Circuit Breaker Lockout

- Material :** ABS
- Locking hole :** 1 number
- Accepts shackle up to :** 7mm
- Weight :** 10gm
- Size :** 55 mm (Length), 55 mm (Width)
 - Inside bended pins :** 5.1mm
 - Inner rectangle 1 size :** 14.85mm X 9.8mm
 - Inner rectangle 2 size :** 12mm X 9 mm
- Application:**
 - This device is suitable for 120V circuit breaker, Circuit Breaker Lockout is used to isolate the electrical energy to procure the electrical hazardous situation, and fits on different sizes of switch tongues with double cavity spaces, durable and easy to install.

| Item Code | Description | Weight |
|-----------|---------------------------------|--------|
| LS-BR32 | Snap-on circuit breaker lockout | 5.5 gm |

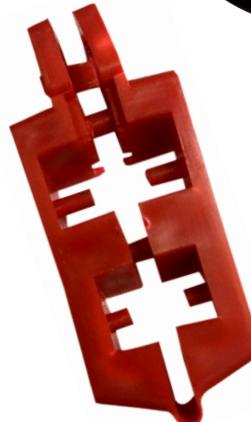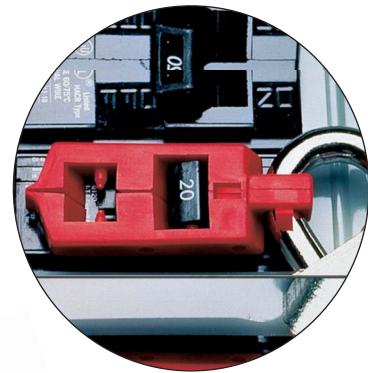

LS-BR32

Large Circuit Breaker Lockout

- Material :** ABS + Metal screw
- Locking holes :** 01
- Accepts shackle up to :** 9mm
- Non foldable screw:** length 19.35mm, thickness 3.7mm
- Size :**
 - Height :** 121mm
 - Width :** 13.4mm (body) / 39.9mm (front flat part)
 - MCB operator locking curve :** 17mm
- It can lockout one to four pole circuit breakers.**
- Lockout wide range of large circuit breakers with a toggle.**

| Item Code | Description | Weight |
|-----------|----------------------|--------|
| LS-BR33 | Normal screw - Large | 35 gm |



LS-BR33

Circuit Breaker/ Fuse Safety Lockout Kit Foldable Screw 2

LS BR38



LS-BR24



LS-BR22



LS-BR20



LS-BR16



LS-BR36

MCB Toggle Loto Device

- **Material :** made of aluminum alloy.
- Suitable for small size circuit breaker
- Can be placed on a small screw driver to loosen the screw and then fit circuit breaker lockout on the MCB and tighten the screw.
- Once done place the padlock to complete lockout.
- Put padlock insert with or without tag after tight the screw.
- **Dimension :** Height- 25mm width-20mm, depth-6mm ,
- **Hole dia :** 8mm
- **Color :** Gold



LS-BR46

Multifunction Circuit breaker lockout with foldable screw

- Multifunction Circuit Breaker Lockout is a versatile device fits on wide range of single, double, triple and four pole of electrical circuit breaker can be accommodates up to one lock and with the help of hasp lockout device can be used for group isolation.
- **Material** – High quality ABS with metallic nut
- Multifunction Circuit Breaker Lockouts will lockout most type of breaker's lever. One size fits in all type of circuit breakers which is UV resistant and suitable for single, double, triple and four pole circuit breaker can be locked with single padlock and lockout hasp.
- Specialty of this lockout is that folding screw is there so that no extra tool required for any assistance.
- **Size** – Height 55mm, Width 20mm, Depth 8mm Locking Hole diameter 8 mm.
- **Color** – Red or can make any color as per the required quantity.



| Item Code | Description | Weight |
|-----------|---|--------|
| LS-BR47 | Multifunction Circuit breaker lockout with foldable screw | 29 gm |

Electric Air Hole Lockout Device

- **Material** – Made from ABS & Rubber.
- While twisting the knob on the lockout, rubber will get disfigured and will lock the device.
- Kinds of rubber hole cork to lock non standard electric hole and other sort of computer power socket.
- Customization of rubber head can be done on the basis of the quantity required.



LS-BR48

Multifunction Big Circuit breaker lockout with foldable screw with Nose

- Multifunction Circuit Breaker Lockout is a versatile device fits on wide range of single, double, triple and four pole of electrical circuit breaker can be accommodates up to one lock and with the help of hasp lockout device can be used for group isolation.
- **Material** – High quality ABS with metallic nut
- Multifunction Circuit Breaker Lockouts will lockout most type of breaker's lever.

One size fits in all type of circuit breakers which is UV resistant and suitable for

- single, double, triple and four pole circuit breaker can be locked with single padlock
- and lockout hasp.
- Specialty of this lockout is that folding screw is there so that no extra tool required for any assistance.

Size – Height 100mm, Width 66mm, Depth 14mm Locking Hole diameter 8 mm.

Color – Red or can make any color as per the required quantity.



LS-BR49

| Item Code | Description | Weight |
|-----------|---|--------|
| LS-BR47 | Multifunction Circuit breaker lockout with foldable screw | 29 gm |

Universal Electrical FUSE Holder Lockout

- Material :** ABS + Metal screw
- Locking holes :** 01
- Accepts shackle up to : 8.4mm
- Small normal screw: length 11.4mm, thickness 4.9mm
- Size :** Height 58.7 mm (Height) and 15 mm (Width)
- locking curve 4.9mm
- This device is suitable for 20A to 400 A fuse holders.
- It is easy to install simply press onto the fuse holders and use a screwdriver to tighten the screw in the device further set the lock and tag by an authorized person.
- Device is ideal to use on multiple fuses.




LS-BR34



LS-BR36



MCB Lockout Tagout Station - Wall Mounted

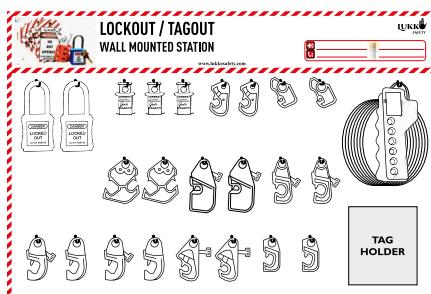


LS-BR40



LS-BR41



LS-BR42

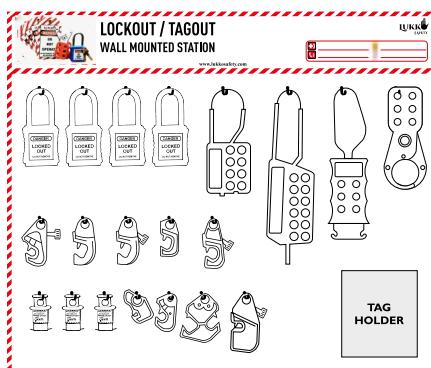

LS-BR43



LS-BR44



LS-BR45

| Item Code | Description | Weight |
|-----------|---|---------|
| LS-BR40 | Station Kit (15" x 22") | 1 Kg |
| LS-BR41 | Station + 2 OSHA Locks + 21 MCB Lockout + 1 Cable Lockout + Tag Set + Pen | 1.7 Kg |
| LS-BR42 | Station + 2 Long Shackle Locks + 21 MCB Lockout + 1 Cable Lockout + Tag Set + Pen | 1.78 Kg |
| LS-BR43 | Station Kit (17" x 22") | 1.48 Kg |
| LS-BR44 | Station + 4 OSHA Locks + 4 Hasp + 12 MCB Lockout + Tag Set + Pen | 1.81 Kg |
| LS-BR45 | Station + 4 Long Shackle Locks + 4 Hasp + 12 MCB Lockout + Tag set + Pen | 2 Kg |

Gate Valve Lockout Device

- Material :** Polypropylene
- Ready for use in five different sizes.
- Locking holes :** 2 / 3 numbers.
- Accepts shackle maximum up to : 8.5mm
- Advantage:** It is designed to fit easily around the gate valve wheel, device is very safe, effective and ideal to lockout the gate valves, extremely rugged for superior impact and chemical resistance, it is long-lasting and easy to use, withstands temperatures ranging from -40 °F to 212 °F



LS-G52


 LS-G52
 LS-G53
 LS-G55
 LS-G56
 LS-G57


| Item Code | Type | Size | Weight |
|-----------|--------|--------------------------------|-----------|
| LS-G52 | A type | 25 to 63.5 mm (1" - 2½" inch) | 62.5 gm |
| LS-G53 | B type | 63.5 to 127mm (2½" - 5" inch) | 176.50 gm |
| LS-G54 | B type | 63.5 to 127mm (2½" - 5" inch) | 176.50 gm |
| LS-G55 | C type | 25 to 165 mm (1" - 6.5" inch) | 280 gm |
| LS-G56 | D type | 165 to 254 mm (6½" - 10" inch) | 650 gm |
| LS-G57 | E type | 254 to 355 mm (10" - 13" inch) | 1250 gm |
| LS-G58 | D type | 165 to 254 mm (6½" - 10" inch) | 650 gm |

Adjustable Gate Valve Lockout Device

- Material:** Polypropylene
- Locking holes :** 4 numbers.
- Accepts shackle maximum up to : 9mm
- Advantage:** It is designed to fit easily around the wheel of gate valve of the size 25mm to 190 mm, this device is very safe, compact, effective and ideal to lockout for easy carrying and storage.

| Item Code | Type | Size | Weight |
|-----------|--------|-------------------------------|--------|
| LS-G55 | C type | 25 to 165 mm (1" X 6.5" inch) | 280 gm |




LS-G55



Lockout Tagout Valve Station

- Material:** 3mm ACP Sheet with Vinyl Pasting
- Size :** (L) 25" x (W) 24.5"
- These stations are customised

| Item Code | Description | Weight |
|-----------|--|---------|
| LS-VK90 | Station | 1.77 Kg |
| LS-VK91 | Station + 6 OSHA Locks + 5 Valve Lockout + 5 MCB Lockout + 1 Cable Lockout + Tag Set + pen | 3.69 kg |



LS-VK90



LS-VK91

Butterfly Valve Lockout

- Material** – Poly Propylene
- This device is used to lockout numerous sizes of butterfly valve.
- Locking holes** : 6 slots on slider part & 12 slots on cover part
- Accepts shackle maximum up to : 9.5mm
- To lockout the handle or actuator of butterfly valve and avoid unexpected energization or start up of valve at workplace.
- Device is having good chemical property with super strong body which is insulating, anti-soluble, anti-fracture with wear resistance to cracking and abrasion.
- Resistant to low and high temperature variation.
- For installation place the cover on the top of valve handle then fix and adjust the slider between the handle of butterfly valve and padlock + tag it.

| Item Code | Type | Size | Weight |
|-----------|-------------------------|--------------------------------|--------|
| LS-BU59 | Suitable for 8 to 45 mm | 303 mm (Cover) and 96mm Slider | 286 gm |



LS-BU59

Available Colour
■ ■ ■

Adjustable Butterfly Valve Lockout

- Material** : Polypropylene
- Locking holes** : 4 numbers.
- Accepts shackle maximum up to : 4.5mm
- Suitable to lockout 8 to 45 mm butterfly valve.
- Slider height increased gradually from 19mm to 31mm
- For installation place the device and fix and adjust the slider between the handle of butterfly valve and padlock + tag it.
- Lock it with cable lockout for best locking effect.
- Advantage:
- This device is fully dielectric device that is very efficient, inexpensive and safe.
- Also highly resistant to solvent and other chemical products, resist cracking, abrasion and higher temperature changes.

| Item Code | Size | Weight |
|-----------|-------------------------|-----------|
| LS-BU61 | Suitable for 8 to 45 mm | ■ 54.5 gm |



LS-BU61

Plug Valve Lockout

- Material** : Polypropylene
- Locking holes** : 1 numbers, LOTO hasp can be used for group isolation.
- Accepts shackle maximum up to : 9mm
- Available in four different sizes to lockout numerous ball valves.
- Having three parts base, clamp and cap.
- Advantage: This device is very efficient, inexpensive and safe, withstands temperatures ranging from -25° to 200°F, handy and convenient to install.

| Item Code | Type | Size |
|-----------|---------|--|
| LS-PV62 | A- Type | Suitable for valve stems with a diameter of 22 mm |
| LS-PV63 | B- Type | Suitable for valve stems with a diameter between 23 mm and 34.9 mm |
| LS-PV64 | C- Type | Suitable for valve stems with a diameter between 44 mm and 53.9 mm |
| LS-PV65 | D- Type | Suitable for valve stems with a diameter between 55 mm and 63.5 mm |



LS-PV62

Ball Valve Lockout

- Material :** Polypropylene
- Available in four different sizes with / without extension to lockout numerous ball valves.
- Locking holes :** 7 / 6 / 5 numbers.
- Accepts shackle maximum up to : 9mm
- Advantage: This device is fully dielectric device that is very efficient, inexpensive and safe, also highly resistant to solvent and other chemical products, resist cracking, abrasion and higher temperature changes, this device is used to lockout the movement of lever for ball valve either in open or closed position, It can lockout the pipes with big diameter range as well as small diameter range

| Item Code | Type | Size | Weight |
|-----------|----------|--|--------|
| LS-BA66 | A type | Ball valve lockout with closed back that fits on valve sizes 9.5mm to 31.5mm | 140gm |
| LS-BA66E | A/E type | Ball valve lockout with closed back that fits on valve sizes 9.5mm to 31.5mm and front extension | 186gm |
| LS-BA67 | B type | Ball valve lockout with open back that fits on valve sizes 50.8 mm to 63.5 mm | 149gm |
| LS-BA67E | B/E type | Ball valve lockout with open back that fits on valve sizes 2" to 2.5" and front extension | 195gm |
| LS-BA68 | C type | Ball valve lockout with legs on slider that fits on valve sizes 2" to 2.5" | 152gm |
| LS-BA69 | C/E type | Ball valve lockout with legs on slider that fits on valve sizes 2" to 2.5" and front extension | 198gm |
| LS-BA70 | D type | Ball valve lockout with legs on slider that fits on valve sizes 2" to 2.5" | 173gm |
| LS-BA71 | D/E type | Ball valve lockout with open back and legs on slider fits Valves 1.5" to 2.5" | 218gm |
| LS-BA72 | E type | fits valves 2" to 8" (50.80mm to 203mm) | 553gm |



Adjustable Flange Ball Valve Lockout

- Material :** Polypropylene
- Locking holes :** 3 numbers.
- Accepts shackle maximum up to : 9mm
- Suitable to lockout 1/4" to 5" flange ball valve after the handle is removed.
- Weight :** 215.5gm
- Accepts shackle maximum up to : 7.7mm
- Advantage: This device is fully dielectric device that is very efficient, inexpensive and safe, also highly resistant to solvent and other chemical products, resist cracking, abrasion and higher temperature changes.


| Item Code | Size | Weight |
|-----------|-------------------------|----------|
| LS-BA73 | Suitable for 1/4" to 5" | 215.5 gm |



Metallic Ball Valve Lockout

- Material :** MS + fully powder coated body
- Locking holes :** 6 / 7 numbers.
- Accepts shackle maximum up to : 9.6mm
- Advantage: Corrosion resistant, high temperature compatible, device is used to lockout the perpendicular / OFF ball valves to avoid unexpected energization or start up of valve at workplace.

| Item Code | Type | Size | Weight |
|-----------|-------|-------------------------|----------|
| LS-BA74 | Small | Fits valves 1/4" to 1" | 86 gm |
| LS-BA75 | Large | Fits valves 1.25" to 3" | 353.5 gm |

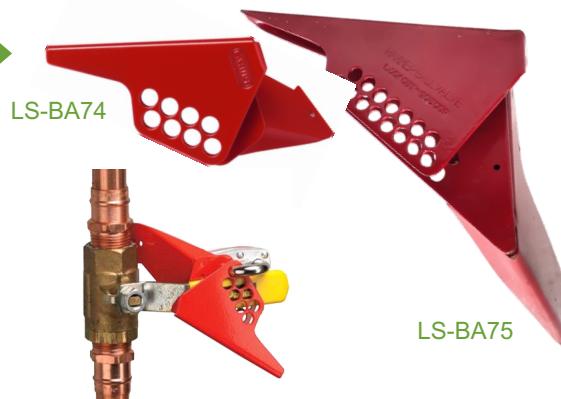

Universal Valve Lockout


- Material :** ABS/PP, Mild stainless steel part, SS sheet and Spring, PU
- Locking holes :** 4 numbers.
- Front Jaw/grip 14.5mm X 28mm, BOLT thickness 7 / 8 mm
- Accepts shackle maximum up to : 9mm
- Can used to lockout gate valve, ball valve and butterfly valve of numerous sizes.
- Application: Lockout large levers, T-handles and other hard to secure mechanical devices, with the help of cable attachment we can lockout the gate valves, and attaching the clamp with butterfly valve handle we can prevent unexpected activation, and can be used to lockout perpendicular / OFF ball valves along with the single / dual arms.



| Item Code | Type | Dimension / Specification | Weight |
|-----------|---|---|---------|
| LS-UV76 | Valve Lockout - lower jaw made of metallic teeth to grip on valve | body length 147mm, | 157.5gm |
| LS-UV77 | Valve Lockout - along with 2 mtr. insulated cable | body length 147mm, Cable length 2mtr. | 230gm |
| LS-UV78 | Valve Lockout + Single Small arm | Arm (metal rod (L) 154.8mm, rod thickness 10.35 mm, Plastic sleeve part length 158.6mm) | 351gm |
| LS-UV79 | Valve Lockout + Dual Small arm | Both Arm (metal rod (L) 154.8mm, rod thickness 10.35mm, Plastic sleeve part length 158.6mm) | 544gm |
| LS-UV80 | Valve Lockout + Single Large arm | Arm (metal rod (L) 203mm, rod thickness 10.35mm, Plastic sleeve part length 210mm) | 410gm |
| LS-UV81 | Valve Lockout + Dual Large arm | Both Arm (metal rod (L) 203mm, rod thickness 10.35mm, Plastic sleeve part length 210mm) | 663gm |
| LS-UV82 | Valve Lockout + Single Small arm + 2 mtr. Insulated cable | Cable length 2mtr Both Arm (metal rod (L) 154.8mm, rod thickness 10.35mm, Plastic sleeve part length 158.6mm) | 425gm |
| LS-UV83 | Valve Lockout + Single Large arm + 2 mtr. Insulated cable | Cable length 2mtr Arm (metal rod (L) 203mm, rod thickness 10.35mm, Plastic sleeve part length 210mm) | 485gm |
| LS-UV84 | Valve Lockout + Double Small arm + 2 mtr. Insulated cable | Cable length 2mtr Both Arm (metal rod (L) 154.8mm, rod thickness 10.35mm, Plastic sleeve part length 158.6mm) | 615gm |
| LS-UV85 | Valve Lockout + Double Large arm + 2 mtr. Insulated cable | Cable length 2mtr Both Arm (metal rod (L) 203mm, rod thickness 10.35mm, Plastic sleeve part length 210mm) | 735gm |
| LS-UV86 | Single Small Arm | Arm (metal rod (L) 154.8mm, rod thickness 10.35mm, Plastic sleeve part length 158.6mm) | 193gm |
| LS-UV87 | double Small Arm | Both Arm (metal rod (L) 154.8mm, rod thickness 10.35mm, Plastic sleeve part length 158.6mm) | 386gm |
| LS-UV88 | Single Large Arm | Arm (metal rod (L) 203mm, rod thickness 10.35mm, Plastic sleeve part length 210mm) | 253gm |
| LS-UV89 | double Large Arm | Arm (metal rod (L) 203mm, rod thickness 10.35mm, Plastic sleeve part length 210mm) | 505gm |

OSHA Safety Lockout Padlock - Steel Shackle

- Durable, lightweight and insulated material lock body
- Metallic Shackle : Height 38mm & 76mm, diameter 6.3mm
- Corrosion resistant lock body, easy to be carried, none silicon, UV resistance
- With strong, durable and zinc plated steel lock shackle, which has excellent anti rust ability, and can increase the hardness of the lock shackle, made of copper alloy material lock cylinder, can effectively eliminate the metal friction spark, key retaining feature: the key can be removed only if the padlock is in locked position, specially design of the double slot key to meet the requirements of multi-level management : KD, KA or MK



LS-LC37



MASTER KEY

OSHA Safety Lockout Padlock - Nylon Shackle

- Nylon Shackle : height 38mm, diameter 6.3mm, nylon shackle plastic synthesized material lock body
- All parts are explosion-proof, anti-magnetic, non-conductive - plastic, copper or brass
- Durable lock body, easy to be carried, none silicon, UV resistance and corrosion resistance, made of copper alloy material lock cylinder, can effectively eliminate the metal friction sparks, nylon shackle: not only completely insulated, but also greatly increase the hardness of the lock shackle, specially design of the double slot key to meet the requirements of multi-level management, KD, KA, MK

LS-LC42



MASTER KEY

LS-LC33



DIFFERENT KEYS

LS-LC35




ALIKE KEYS

Weight

| Item Code | Description | Weight |
|-----------|---|---------|
| LS-LC33 | Different Key (KD) | 108.5gm |
| LS-LC34 | Different Key (KD) - Set of 3 | 325.5gm |
| LS-LC35 | Alike Key (KA) - Set of 5 | 542.5gm |
| LS-LC36 | Alike Key (KA) - Set of 10 | 1.085Kg |
| LS-LC37 | Master Key (MK) with 2 individually keyed - Set of 5 | 542.5gm |
| LS-LC46 | Long Shackle Different Key (KD) | 128.5gm |
| LS-LC47 | Long Shackle Different Key (KD) - Set of 3 | 385.5gm |

LS-LC46



LS-LC38



DIFFERENT KEYS

LS-LC40



ALIKE KEYS

Weight

| Item Code | Description | Weight |
|-----------|---|----------|
| LS-LC38 | Different Key (KD) | 78 gm |
| LS-LC39 | Different Key (KD) : Set of 3 | 234 gm |
| LS-LC40 | Alike Key (KA) : Set of 5 | 390 gm |
| LS-LC41 | Alike Key (KA) : Set of 10 | 780 gm |
| LS-LC42 | Master Key (MK) with 2 individually keyed - Set of 5 | 542.5 gm |
| LS-LC48 | Long Shackle Different Key (KD) | 100gm |
| LS-LC49 | Long Shackle Different Key (KD) : Set of 3 | 300 gm |

LS-LC48



OSHA SAFETY STEEL WIRE PADLOCKS

- Durable, lightweight and insulated material lock body
- **Steel Wire Shackle** : Height 300mm, diameter 4mm
- Corrosion resistant lock body, easy to be carried, none silicon, UV resistance
With strong, durable and zinc plated steel lock shackle, which has excellent anti rust ability, and can increase the hardness of the lock shackle.
- Made of copper alloy material lock cylinder, can effectively eliminate the metal friction spark
- Key retaining feature: the key can be removed only if the padlock is in locked position
- Specially design of the double slot key to meet the requirements of multi-level management : KD, KA or MK
- *Customized labels, can provide content / logo / serial numbers / authorized personnel image / along with their name / and contact details with respect to the quantity required.
- Also KEYS can be customized, with serial number engraved in it.
For customization in advance communicate with sales team.
- **DIFFERENT KEY (KD) , ALIKE KEY (KA) , MASTER KEY (MK)**, with 2 individually keyed



LS-LW62

| Body Height | Body Width | Body Depth | Wire Height | Wire Width | Wire Thickness |
|-------------|------------|------------|-------------|------------|----------------|
| 45mm | 37mm | 21mm | 600mm | 23mm | 5mm |

OSHA SAFETY INSULATED STEEL WIRE PADLOCKS

- Durable, lightweight and insulated material lock body with insulated steel wire
- Insulated Steel Wire Shackle : Height 600mm, diameter 5mm
- Corrosion resistant lock body, easy to be carried, none silicon, UV resistance
With strong, durable and zinc plated steel lock shackle, which has excellent anti rust ability, and can increase the hardness of the lock shackle.
- Made of copper alloy material lock cylinder, can effectively eliminate the metal friction spark
- **Color** : Red ,Yellow, Blue, Green Transparent & as per customer voice
Key retaining feature : the key can be removed only if the padlock is in locked position
- Specially design of the double slot key to meet the requirements of multi-level management : KD, KA or MK
- *Customized labels, can provide content / logo / serial numbers / authorized personnel image / along with their name / and contact details with respect to the quantity required.
- Also KEYS can be customized, with serial number engraved in it.
- For customization in advance communicate with sales team.
- **DIFFERENT KEY (KD) , ALIKE KEY (KA) , MASTER KEY (MK)**, with 2 individually keyed



LS-LW63



LS-LW64

| Body Height | Body Width | Body Depth | Wire Height | Wire Width | Wire Thickness |
|-------------|------------|------------|-------------|------------|----------------|
| 45mm | 37mm | 21mm | 300mm | 23mm | 4mm |

Regular & Long Shackle Jacket LOTO Safety Padlock

- Made of metallic body clipped with Injection moulded De electric JACKETS of ABS material
- Specifically drafted instruction high quality **DANGER** label (laminated) for each lock is provided



LS-LC45

LS-LC43




LS-LC44



- Individual lock is supplied with 3 identical keys
(All keys can be punched with same serial number as on lock if required)

| Item Code | Description | Weight |
|-----------|----------------------------|---------|
| LS-LC43 | Regular shackle | 114gm |
| LS-LC43S | Regular shackle : Set of 3 | 342gm |
| LS-LC44 | Long shackle | 147.5gm |
| LS-LC44S | Long shackle : Set of 3 | 442.5gm |

| Lock Dimension | | | | | | |
|-----------------|-----------------|----------------|----------------|--------------------|-------------------|-----------------------|
| Name | Body Height (A) | Body Width (B) | Body Depth (C) | Shackle Height (D) | Shackle Width (E) | Shackle Thickness (F) |
| Regular Shackle | 37.2 mm | 44 mm | 21.7 mm | 20 mm | 19.6 mm | 5.4 mm |
| Long Shackle | 37.2 mm | 44 mm | 21.5 mm | 52 mm | 20.6 mm | 5.4 mm |



Padlock Eye



BENDED TYPE



FLAT TYPE



| Item Code | Type | Dimension (mm) | Die | Nut Die | Thickness | Weight |
|-----------|------------|--------------------------------|------|---------|-----------|--------|
| LS-LC48 | Small | 32 x 25.6 (Flat Type) | 10mm | 3.70mm | 1.4mm | 45gm |
| LS-LC50 | Medium | 40 x 25.6 (Flat Type) | 10mm | 3.70mm | 1.4mm | 70gm |
| LS-LC52 | Big | 47 x 25.6 (Flat Type) | 10mm | 3.70mm | 1.4mm | 80gm |
| LS-LC54 | Large | 57 x 25.6 (Flat Type) | 10mm | 3.70mm | 1.4mm | 110gm |
| LS-LC56 | Jumbo | 62 x 25.6 (Flat Type) | 10mm | 3.70mm | 1.4mm | 120gm |
| LS-LC49 | Small (B) | 22 x 25.6 x 10 (Bended Length) | 10mm | 3.70mm | 1.4mm | 50gm |
| LS-LC51 | Medium (B) | 30 x 25.6 x 10 (Bended Length) | 10mm | 3.70mm | 1.4mm | 60gm |
| LS-LC53 | Big (B) | 37 x 25.6 x 10 (Bended Length) | 10mm | 3.70mm | 1.4mm | 85gm |
| LS-LC55 | Large (B) | 47 x 25.6 x 10 (Bended Length) | 10mm | 3.70mm | 1.4mm | 110gm |
| LS-LC57 | Jumbo (B) | 52 x 25.6 x 10 (Bended Length) | 10mm | 3.70mm | 1.4mm | 125gm |

Padlock Eye Accessories

| Item Code | Description | Weight |
|-----------|--|--------|
| LS-LC58 | BUFFER for Padlock Eye : 25mm (Width), nut / screw dia. 4mm, thickness 1.2mm | 50gm |
| LS-LC59 | Bolts, Nuts and screws for padlock eye | 19.5gm |
| LS-LC60 | Metallic rivets for padlock eye | 10gm |
| LS-LC61 | Rivet machine for padlock eye - Hand punch tool | 435gm |



LS-LC58



LS-LC60



LS-LC59




LS-LC61

Lockout Padlock Holder with/without lock Security Lock

- **Material :** Made of ABS material.
- Contains 12 holes for hanging padlocks and other LOTO items.
- **Size :** Top Width 130mm Bottom width-180mm Height -130mm
Easy to handle and can carry on waist belt to make work hassle free.
Can be carried on the waist belt with the hooks as shown in the image.
- **Weight :** 150 grams.
- **Color :** Red or as per BULK quantity
- **With Material :** 12 holes for hanging padlocks. It can be carried as a
waist belt as well as can be carried free handedly. Contains 12 Padlocks.



LS-LW62

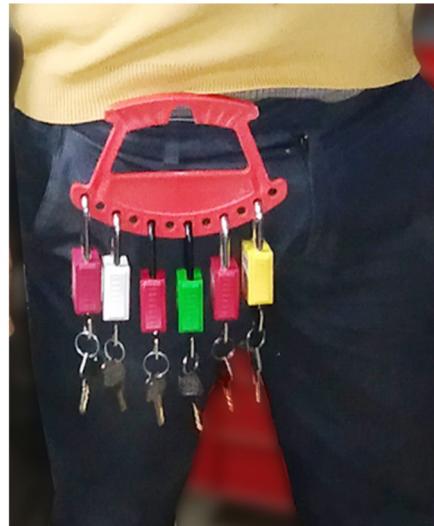

LS-LW63

LOTO Tags - Paper / Plastic / Synthetic

- Material:** Polyester Or Plastic
- Weight:** 6.5gm
- Thickness :** 0.4mm ($\pm 10\%$)
- Size :** length 78mm X 142mm, Diameter of eyelet 7.6mm
- Application:** It can be tied up with simple / numbered cable ties or directly tuck the padlock shackle inside the punched eye lid, and then write message with the normal / rewritable permanent marker pen.
- Advantage:**
 - Weather and tear proof, oil resistant.
 - Re - writeable and reusable.
 - Main utilization of Tagout system is to communicate safety and lockout information like Danger, Caution and Do not attempt to operate Or Out of service any switch, valve, or other energy isolating device bearing a padlock.
 - Customize tags hence we can make the design / application specific display an application specific messages in the preferred language like English, Hindi etc.



LS-T47



LS-T50



Plastic
LS-T85



Metallic
LS-T86



LS-T51




LS-T52



LS-T58



LS-T66



LS-T55



LS-T67



LS-T64



LS-T59



LS-T69



LS-T48



LS-T49



LS-T46

Insertion Tag Holder

- Material :** High quality ABS
- Size :** 329mm X 100mm
- Circular cutting diameter :** 64.3mm
- Weight:** 72gm
- Thickness :** Upper thin part 2.3mm ($\pm 10\%$), lower insertion part 6.4mm
- Tag insertion thickness :** 1.1mm ($\pm 10\%$)
- Application:** Provide procedural, system and legal compliance with workplace safety regulations, designed for all construction and industrial situations involved scaffoldings.

| Item Code | Description | Weight |
|-----------|---------------------|--------|
| LS-T75 | Scaffold Tag Holder | 72 gm |



LS-T76

Insertion Tag

- Material :** Polyester Or Plastic
- Size :** 193mm X 91mm
- Weight:** 11gm
- Thickness :** 0.5mm ($\pm 10\%$)



To use scaffold Erection and inspection Record

Do not use scaffold Erection and inspection Record

Scaffold Erection and inspection Record

LS-T83



Scaffolding Tag

- Material :** Polyester Or Plastic
- Size :** 203mm X 95mm
- Circular cutting diameter :** 55mm
- Weight:** 10gm
- Thickness :** 0.5mm ($\pm 10\%$)
- Application:**
 - Weather & tear proof, oil resistant.
 - Re - writeable and reusable.
- Used to avoid multiple hazards or unsafe situation like falls and falling object at workplace.
- Tagging occurs to approach heighted points including ladder & ramps, prohibits cross braces from being used to access the scaffolding.



LS-T71



LS-T72



LS-T73



| Colour | Description |
|--------|--|
| Red | DANGER do not use / Unsafe or incomplete scaffolds |
| Yellow | Under construction (Erection & dismantling) |
| Green | Ready to use |

CAUTION MAGNET SIGN

Material : PVC Sheet 0.45 to 0.50 mm thick.

Magnet on back side.

Size : 100x200mm

You can use it for any metallic area or electrical panels and many more type of metallic walls

Caution sign with warning for lockout or other safety notice as your requirement.



LS-T95

CAUTION MAGNET SIGN

Material : Vinyl

self adhesive on backside for pasting

Size : 100x200mm

You can use it for type of placed (like wall, panels)

Caution sign with warning for lockout or other safety notice as your requirement.



LS-SB38

LOCKOUT TAGOUT ISOLATION REGISTER

- **Size :** 10x6.5 Inch
- LOTO record register is used to maintain records at isolation site.
- Can maintain records with details of different LOTO items and equipments. Can use to record details when, how, where and to whom the LOTO items were issued. Also helpful to maintain record of the LOTO items with the details of energy sources, type of energy locked out and other relevant data related to lock out



LS-R111

SECURITY SEALS

- **Body :** Made from aluminium alloy body, with galvanized aircraft cable.
- **Size :** 25mm x 22.40 mm app.
- **Cable :** Galvanized steel , 1.5/2/2.5 mm dia.
- **Length :** 300 mm
- **Marking :** individual number on each piece
- **Color Anodized :** red, yellow, black , blue , green, aluminum on volume basis
Customization Colors can make on huge volume

Single / dual / Numerous color combination
Content / Size can be modify as per requirement

WE CAN MAKE CUSTOMIZED SEALS ALSO AS YOUR CHOICE.....



(SET OF 10)

LS-CS33

SAFETY TAG HOLDER STATION / DOCUMENT PERMIT HOLDER

Safety Tag Stations & Holders



Size : (L) 14" X (W) 9"

Weight : 595 gm

LS-T88



Size : (L) 14" X (W) 9"

Weight : 595 gm

LS-T89



Size : (L) 14" X (W) 14"

Weight : 925gm

LS-T90



LS-T92





Size : (L) 14" X (W) 14"

Weight : 925gm

LS-T91

Permit Document Holder / Wallet

- Heavy duty transparent permit document holders ideal for storing important information at source in adverse conditions. Complete with reinforced eyelet and side zip. Supplied in Set of 10.



LS-T95

Multi-purpose Cable Lockout Scissor Type

- Material:** ABS + insulated Steel cable
- Accepts shackle maximum up to : 7.5 mm
- Locking holes :** 6 numbers to provide group isolation
- Body measure :** 20mm (L) x 12.9mm (B) x 28.2 / 47mm (H)
- Cable length : provided 2 mtr. along with a device Or can be customize 5mtr, 10mtr, 20mtr or more as per the demand.
- Cable thickness : 5mm
- Install by simply fix the cable end through the device need to be locked out squeezing the device and tighten and adjust the cable and place padlock and tag for identification.
- Advantages:**
 - All purpose highly durable, flexible, strong and corrosion resistant insulated lockout device is ideal to be used in wet or cold climate.
 - It's very useful device as it can be used to lockout Electrical as well as mechanical devices like oversized valves, switches and connectors.

| Item Code | Description | Weight |
|-----------|---|----------|
| LS-C37 | Body without cable | 35 gm |
| LS-C38 | Adjustable Cable lockout + 2 mtr cable | 100.5 gm |
| LS-C39 | Adjustable Cable lockout + 2 mtr. cable | 100.5 gm |

** Length, diameter and colour of the cable can be customized.



LS-C39



LS-C38



Multi-use Cable lockout

- Material:** : ABS & insulated steel cable.
- Complete length : 149mm
- Jaw Size :** 20mm
- Accepts shackle maximum up to : 8mm
- Locking holes :** 6 numbers
- Weight :** 100gm
- Locking arrangement: Carrying totally six holes for group isolation.
- Cable length : provided 2mtr. along with a device Or can be customize 5mtr, 10mtr, 20mtr or more as per the demand.
- Cable thickness : 5mm.
- Advantage:**
 - The device is very versatile in nature that can be used as a hasp as well as cable lockout to isolate difficult points.
 - This device can be used to lockout huge range of industrial plant equipments either electrical, mechanical and even forklift steering wheels.
 - Highly resistant to solvent and other chemical products, resist cracking, abrasion and higher temperature changes.
- Installation Method:** For the purpose of installation First shut down the source of energy to lockout the device then tied up and fix the cable tightly on the faulty device and bound it well , so that device can't move and place padlock and tag for identification.



LS-C41



| Item Code | Description | Weight |
|-----------|-------------------------|--------|
| LS-C41 | Multi-use Cable Lockout | 120 gm |

Flexible Cable Lockout - Round

- Material:** : ABS & insulated steel cable.
- Accepts shackle maximum up to : 7mm
- Locking arrangement: 6 numbers for group isolation.
- Cable length : provided 2mtr. along with a device Or can be customize 5mtr, 10mtr, 20mtr or more as per the demand.
- Cable thickness : 5mm.
- Outer diameter : 47.9mm
- Cable insertion slot 6mm
- Advantages:**
 - All purpose highly durable, flexible, strong and corrosion resistant insulated lockout device is ideal to be used in wet or cold climate, highly resistant to solvent and other chemical products, resist cracking, abrasion.
 - Ideal to lockout Electrical as well as mechanical devices like oversized valves, switches and connectors.
 - Can install perfectly, OPEN / LOCK by using extra tool provided.
 - Withstands temperatures ranging from -20°C to 55°C



LS-C46

LS-C47

| Item Code | Description | Weight |
|-----------|---|--------|
| LS-C42 | Round Body without cable | 36gm |
| LS-C43 | Round Body without cable | 36gm |
| LS-C44 | Round Body without cable | 36gm |
| LS-C45 | Round Body without cable | 36gm |
| LS-C46 | Flexible Cable lockout + 2 mtr. cable | 100gm |
| LS-C47 | Flexible Cable lockout + 2 mtr. Cable + 1 tightening handle | 135gm |

Flexible Metallic Cable Lockout

- Material :** Stainless Steel with Chrome coated
- Accepts shackle maximum up to : 9mm
- Locking arrangement: 8 numbers for group isolation.
- Cable length : provided 2mtr. along with a device Or can be customize 5mtr, 10mtr, 20mtr or more as per the demand.
- Cable thickness : 5mm.
- Advantages:** all purpose highly flexible, strong and corrosion resistant. ideal to lockout Electrical as well as mechanical devices like oversized valves, switches and connectors, can install perfectly, OPEN / LOCK by using extra tool provided, Withstands high temperature, tamper - proof screw confirms that the device is secured.



LS-C49

| Item Code | Description | Weight |
|-----------|--|--------|
| LS-C48 | Flexible Metallic Cable Lockout without tool | 36gm |
| LS-C49 | Flexible Metallic Cable Lockout with tool | 36gm |

Looped cable Lockout

- Material:** Made of PVC insulated coating steel cable
- Type: Single / dual ended loop
- Weight :** 62gm / 65gm (Approx)
- Cable length : provided 2mtr. Or can be customize 5 mtr, 10 mtr, 20 mtr or more as per the demand.
- Advantage: These are lighter in weight and are better visual check that the isolation point is Locked out instead of using bigger and heavier metallic chains, It is useful to lockout Electrical as well as mechanical devices, can be used to lock both large and small valves, thickness of the cable is 5 mm, **weight:** 25 gram per meter, loop length 40mm

| Item Code | Description | |
|-----------|---------------------------------------|--|
| LS-C50 | Single end looped Cable PVC Insulated | |
| LS-C51 | Dual end looped Cable PVC Insulated | |



Multipurpose cable lockout

- Material :** MS + chrome coating + covered by ABS & insulated steel cable.
- Accepts shackle maximum up to: 8mm
- Locking holes :** 6 numbers, **Jaw size :** 52mm, Complete length : 150mm
- Width : 57mm
- Locking arrangement: Carrying totally six holes for group isolation.
- Cable length : provided 2mtr. along with a device Or can be customize 5mtr, 10mtr, 20mtr or more as per the demand.
- Cable thickness : 5mm.
- Advantage: this device can be used to lockout huge range of industrial plant equipments either electrical, mechanical and even forklift steering wheels, can be used alone as a lockout hasp or with the provision of double sided looped insulated cable it can be used as a cable lockout, upper cover made it electrically safe and device is corrosion resistant.

| Item Code | Description | |
|-----------|----------------------------|--|
| LS-C40 | Multipurpose cable lockout | |



LS-C40

Adjustable Cable Lockout

- Material:** : ABS & insulated steel cable.
- Accepts shackle maximum up to : 8mm
- Locking arrangement: 5 numbers for group isolation.
- Weight:** 155gm
- Cable length : provided 2mtr. along with a device Or can be customize 5mtr, 10mtr, 20mtr or more as per the demand.
- Cable thickness : 5mm.
- Advantages:**
 - Shock, wear and rust resistant with highly durable, flexible, strong insulated lockout device is ideal to be used in wet or cold climate, highly resistant to solvent and other chemical products, resist cracking, abrasion.
 - Ideal to lockout Electrical as well as mechanical devices like oversized valves, switches and connectors.
 - Withstands temperatures ranging from -50°C to 125°C

| Item Code | Description | |
|-----------|--------------------------|--|
| LS-C56 | Adjustable Cable lockout | |



LS-C56



Electrical Panel Lockout

- Material :** Polycarbonate
- Locking holes :** 2 numbers to provide group isolation

| Name | Dimension (mm) | | | | |
|--------------|------------------|------------------------|-----------------|-------|-------------------------------|
| | Cover Outer base | Upper Cover inner size | inner body base | Depth | Accepts shackle maximum up to |
| Square small | 67.5 | 45 | 50.5 | 57 | 6.8 |
| Round | 96.2 | 79.4 | 87 | 66 | 6.8 |
| Square Big | 106 | 82 | 91 | 93.5 | 8.5 |

- Electrical panel lockout device is used to lockout electrical panel buttons and switches where there is no inbuilt lockout provision is provided. push button and rotary switch covers, which is secured with a padlock or hasp and this cover prohibits access to a switch or control on the electrical panel. Body made in two parts of transparent bases and cover that allow visibility of nameplates and labels.
- This transparent Cover for Panel Switches completely seals the Switch and allows the user to see what position the switch is locked on.

| Item Code | Description | Weight |
|-----------|-------------------------------------|---------|
| LS-EP51 | Square small | 65.5gm |
| LS-EP52 | Square small - connected with chain | 69.5gm |
| LS-EP53 | Round Body | 88.5gm |
| LS-EP54 | Round Body - connected with chain | 91.5gm |
| LS-EP55 | Round Body with 45° cut | 84.5gm |
| LS-EP56 | Round Body with 90° cut | 84.5gm |
| LS-EP57 | Square Big | 158gm |
| LS-EP57C | Square Big - connected with chain | 161.5gm |
| LSa-EP58 | Square Big with 45° cut | 150.5gm |
| LSa-EP59 | Square Big with 90° cut | 148gm |

Electric Panel handle Lockout

- Material :** ABS base + Steel / polypropylene strip
- Accepts shackle maximum up to : 8mm
- Locking holes :** 10 numbers each side
- Base Size :** 39.4mm / 57.7mm
- Metallic Strip Size :** length 432mm X width 19.10mm
- Four holes of 2.2mm provided to fix it up with screw if require.
- Device is used to lockout all kind of levers / handles connected to the electrical panel that is having no locking provision.
- For installation fix the sticky round yellow base (with high quality 3M adhesive) rigidly then tighten the metallic / plastic strip accordingly to freeze the movement of operating lever / handle, & place the padlock and tag.

| Item Code | Description | Weight |
|-----------|---|---------|
| LS-EP60 | Panel lockout / metallic strip | 37 gm |
| LS-EP61 | Panel lockout / metallic strip with padlock | 83 gm |
| LS-EP62 | Panel lockout / plastic strip | 19.5 gm |
| LS-EP63 | Panel lockout / plastic strip with padlock | 65.5 gm |




LS-EP57 LS-EP53 LS-EP51



LS-EP52 LS-EP54
LS-EP57C



LS-EP58/59 LS-EP55/56

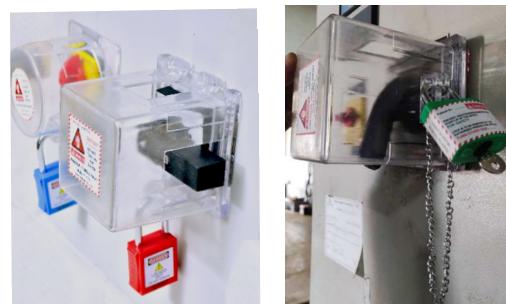

LS-EP60



LS-EP61



ELECTRICAL PANEL LOCKOUT (SQUARE LARGE)

- **Material :** Polycarbonate
- **Locking holes :** 2 numbers to provide group isolation
- **Size :**
 - Upper Cover inner size = 124mm X 124mm
 - Upper Cover inner size = 100mm X 100mm
 - Inner body base = 110mm X 110mm
 - Depth = 95mm
- **Accepts shackle maximum up to = 8.5mm**
- Electrical panel lockout device is used to lockout electrical panel buttons and switches where there is no inbuilt lockout provision is provided. push button and rotary switch covers, which is secured with a padlock or hasp and this cover prohibits access to a switch or control on the electrical panel. Body made in two parts of transparent bases and cover that allow visibility of nameplates and labels. This transparent Cover for Panel Switches completely seals the Switch and allows the user to see what position the switch is locked on.

| Item Code | Description | Weight |
|------------|-------------------------------------|--------|
| LS-EP57 | PLAIN SQUARE LARGE | |
| LS-EP57C | SQUARE LARGE - CONNECTED WITH CHAIN | |
| LS-EP57L45 | SQUARE LARGE BODY WITH 45° CUT | |
| LS-EP57L90 | SQUARE LARGE BODY WITH 90° CUT | |



ELECTRICAL PANEL LOCKOUT (SQUARE LARGE)

- Electrical Panel Lockout is used to lock nearly all electrical panels and covers that are installed with exposed screws threaded into the panel back-box, preventing the panel so that by mistake no one operates the panel.
- **Material :** Poly carbonate. For locking purpose one Padlock eye-molded polycarbonate.
- Can be used with lockout hasp.
- Provision of 4 small molded holes on back side of border of box to hang on any surface.
- Can put double side tape on back border to stick on any electrical panel surface.
- **Dimension Upper Part :** Height – 210mm x Width – 260mm x Depth – 40mm
- **Dimension Inner Part :** Height – 200mm x Width – 250mm x Depth – 35mm
- It can carry on any isolation area, indoor and outdoor application suitable in moisture and even in corrosion area.
- **Color :** Transparent

| Item Code | Description | Weight |
|-----------|---|--------|
| LS-EP71 | TRANSPARENT GLASS CONTROL PANEL LOCKOUT | 587gms |



LS-EP71

Electrical panel Lockout Device -Switch Lever Blocker

- Material :** Electrical Panel Lockout Are Made of Durable Lightweight, Insulated Engineering Plastic / Nylon
- Size of Yellow part :** 53x51 mm with provision of hole.
- Size of Metal part :** 31 mm x (40mm + 37mm at end of part) mm , but cantilever part from yellow base : 31mm x 40 + 37 at end of part) mm
- Yellow Base Part can be fixed by double sided tape or screw.
- Different shape lockouts can be customized on quantity basis.
- Cover drawer with switch handle, change over switch lockout device as shown in Image to prevent accident.
- Always use Lockout Tagout while shutdown and maintenance work.



LS-EP72

| Item Code | Description | Weight |
|-----------|--|--------|
| LS-EP72 | Electrical panel Lockout Device - Switch Lever Blocker | 49gms |

Electrical panel Lockout Device - Round Rotating Knob Blocker

- Material :** Electrical Panel Lockout Are Made of Durable Lightweight, Insulated Engineering Plastic / Nylon
- Size of Yellow part :** 53x51 mm with provision of hole.
- Size of Metal part :** 81 mm x (40mm + 30mm at end of part) mm , but cantilever from yellow base , internal tapper cut shape size -25 mm top x 33mm bottom part
- Yellow Base Part can be fixed by double sided tape or screw.
- Different shape lockouts can be customized on quantity basis.
- Covers knob switch and change over switch to put lockout device as shown in image to prevent accident handle, lever in the hole.
- Always use Lockout Tagout while shutdown and maintenance work.



LS-EP73

| Item Code | Description | Weight |
|-----------|---|--------|
| LS-EP73 | Electrical panel Lockout Device - Round Rotating Knob Blocker | 50gms |

Electrical panel Lockout Device - Flat Button / Hole Blocker

- Material :** Electrical Panel Lockout Are Made of Durable Lightweight, Insulated Engineering Plastic / Nylon
- Size of Yellow part :** 53x51 mm with provision of hole.
- Size of Metal part :** 78.5mm x 40 mm , but cantilever part from yellow base : 40mm x 40mm x 43 mm (center height)
- Yellow Base Part can be fixed by double sided tape or screw.
- Different shape lockouts can be customized on quantity basis.
- Can put over button switch and lock hole for distribution cabinet's lockout device as shown in image to prevent accident.
- Always use Lockout Tagout while shutdown and maintenance work.



LS-EP74

| Item Code | Description | Weight |
|-----------|--|---------|
| LS-EP74 | Electrical panel Lockout Device - Flat Button / Hole Blocker | 84.5gms |

Electrical panel Lockout Device - Raised Button Blocker

- Material :** Electrical Panel Lockout Are Made of Durable Lightweight, Insulated Engineering Plastic / Nylon
- Size of Yellow part :** 53x51 mm with provision of hole.
- Size of Metal part :** 88 mm x (40 + 35 at end of part) mm , but cantilever part from yellow base : 40mm x 40 + 35 at end of part) mm Yellow Base Part can be fixed by double sided tape or screw.
- Different shape lockouts can be customized on quantity basis.
- Put over low voltage drawer, electrical panel door or over electric handle hole for lockout device as shown in image to prevent accident.
- Always use Lockout Tagout while shutdown and maintenance work.



LS-EP75

| Item Code | Description | Weight |
|-----------|---|--------|
| LS-EP75 | Electrical panel Lockout Device - Raised Button Blocker | 68gms |

Emergency Over Size push button lockout - 1 locking hole

- Emergency switch or push button lockout device is used to protect the emergency push button to prevent uncertain condition caused by human error which is totally safe from any energy source.
- Material :** Strong Polycarbonate body
- This device is rotary and ideal to fix by pressing and screw on electrical switch button permanently and prevent worker by operating for a mistake, having two parts with detachable hinges
- Color :** Transparent Glass.
- Size :** 70mm x 85mm
- Used to provide safety from switches/push button from 22.5 mm to 30.5 mm
Can accommodate buttons upto 50 mm diameter 55 mm tall
- Hole Dia :** 7mm
- Weight :** 50gms



LS-EP76

| Item Code | Description | Weight |
|-----------|-------------------------------|--------|
| LS-EP76 | EMERGENCY PUSH BUTTON LOCKOUT | 11gms |

Round Di-Electric Lockout Device

- Material :** ABS attached with rivet
- Accepts shackle maximum up to : 7.5mm
- Locking holes :** 1 numbers
- Size :** 46.3 mm (Outer Dia) and 32.35 mm (Inner Die)
- Three holes of 3mm provided to fix it up with screw if require.
- Round Shape Di-Electric Lockout device is used to lock the racking in-out point of Air circuit breaker and vacuumed circuit breaker so that no-one can operate the particular device, also can lock some sort of switches that are inserted inside a plane surface.
- Made by riveting two pieces which can be easily rotated in any direction having three holes at bottom part to fix with the screw and also can be stucked with the strong double sided pre-adhesive on requirement for locking purpose.



LS-EP64



Mushroom Emergency Push Button Lockout

- Material :** Polypropylene
- Locking Arrangement : 2 numbers.
- Accepts shackle maximum up to : 8.5mm
- Size :** Outer dia. 80mm X 39.5mm, Inner dia. 70mm X 30.8mm
- Weight :** 62.5gm
- Advantage:**
 - It is designed to fit comfortably around Mushroom push-button switch / single-pole / electromechanical / emergency stop of normal size.
 - This device is very safe, effective and ideal for lockout.
 - Extremely rugged for superior impact and chemical resistance



LS-EP65



LS-EP66

Emergency Push Button Lockout

- Material :** Polycarbonate
- Locking Arrangement : 1 number.
- Accepts shackle maximum up to : 7 to 7.5mm
- Device covers and block the access to emergency push button ON / OFF controls.



LS-EP67



LS-EP68

| Lock Dimension | | | | |
|----------------|-----------------------------------|-----------------------|------------|---------------------|
| Name | Complete height (including cover) | Internal dia. of base | Base Depth | Round dia. of cover |
| LS-EP67/68 | 47mm | 32.7mm | 39.1mm | 25.2mm |

| Lock Dimension | | | | | | |
|----------------|-----------------------------------|---------------|---------------------------|--------------------|-------------------|------------|
| Name | Complete height (including cover) | Internal dia. | Central cut dia. on cover | Upper cover height | Lower base height | Base Depth |
| LS-EP69 | 55.4mm | 44.37mm | 23.4mm | 19.5mm | 37mm | 34.5mm |

| Item Code | Description | Weight |
|-----------|---|---------|
| LS-EP67 | Emergency Push Button Lockout square cover - with chain | 20 gm |
| LS-EP68 | Emergency push button lockout square cover - with chain | 23 gm |
| LS-EP69 | Emergency push button lockout square cover - with chain | 31.5 gm |



LS-EP69



Plug Power Cord Lockout - Small / Medium

- Material :** ABS
- Accepts shackle maximum up to : 9mm
- Locking holes:** 3 / 4 numbers.
- Installation :** At one time four authorized personnel can Lockout the particular device by using their padlocks (with color code) after their mutual concern they can remove their particular padlocks and insert the plug for further operation.
- Advantages:**
 - Electrical Power Plug Chord Lockout removes the chance to put the plug accidentally back to the socket while working in maintenance and isolate the plug chords.
 - It can be used over high and low voltage plugs and applicable on various chord diameter used to avoid electrical accidents.



3 in 1 Electrical Plug Lockout

- Material :** Poly Propylene with printed label of "DANGER" for identification
- Accepts shackle maximum up to : 9mm
- Locking holes:** 1 numbers.
- Weight:** 112gm
- Body measure :**
 - Outer diameter : above 87mm, lower 83mm
 - Complete length with cover : 160 mm
 - Can lockout equipment of **size** : 3.3" width x 6" Length
 - Cover circular dia : 34.3mm
- Device is super strong, insulating, anti-soluble, anti-fracture with wear resistance to cracking and abrasion.
- Ability to require multiple authorizations for operation of a locked-out cylinder knob and electrical chords.
- Lockout devices are made from high-quality recycled materials, and meet or exceed OSHA regulations.
- Durable construction is designed to withstand the rigors of an industrial environment.



Item Code Description

| | | |
|---------|--|--|
| LS-PL80 | 3 in 1 electrical plug Lockout - Yellow cover | |
| LS-PL81 | 3 in 1 electrical plug Lockout - Red cover 3 in 1 electrical plug Lockout - Yellow cover | |



Three - Phase Plug Lockout

- Material :** Nylon
- Accepts shackle maximum up to : 9mm
- Locking holes:** 1 numbers.
- Suitable for:** 220 - 240V three phase plugs.
- Body measure :** diameter 88mm
- Device is super strong, insulating, anti-soluble, anti-fracture with wear resistance to cracking and abrasion.
- Prevent wired plugs from unexpected switched ON.
- Lockout devices are made from high-quality recycled materials, and meet OSHA regulations.
- Durable construction is designed to withstand the rigors of an industrial environment.

| Item Code | Description | Weight |
|-----------|--------------------------------|--------|
| LS-PL82 | 3 in 1 electrical plug Lockout | 22 gm |

LS-PL82



Plug Lockout Station Kit

Kit includes:

- 1 X Small wall mounted station
- 1 X 3 in 1 plug lockout
- 1 X OSHA Padlock
- 1 X "DO NOT OPERATE" tag
- 2 X cable tie

| Item Code | Description |
|-----------|--------------------------|
| LS-PL83 | Plug lockout station kit |



LS-PL83

Hanging Plug & Hoist Lockout Cover

- **Material :** Nylon bag
- Accepts shackle maximum up to : 9mm
- **Locking holes:** 6 numbers.
- **Weight :** 134.5gm
- **Size :** Width 18cm X Length 43cm
- Used to Lockout hanging odd size electrical plug / power cord & hoist controls.
- Non - tear able fabric with leather riveted belt that is for tightening the cover and place padlock and tag for identification.

| Item Code | Description |
|-----------|-------------|
| LS-PL84 | Plug Cover |



LS-PL84

Plug Power Lockout

- Directly inserted in power source, this lockout device can effectively insulate electric power energy and prevent accidental operation during maintenance.
- Can put a padlock or hasp to ensure the lockout of power source.
- Its installation needs no tools. The eye-catching bright red alerts the people who intend to restore the energy.
- Two labels are provided on both sides of the lock to warn that the power plug is locked out and cannot be removed or record the information on the person who is performing the lock-out procedure.

| Item Code | Description |
|-----------|--|
| LS-PL85 | Small - Suitable for 16A, 110/240V power source |
| LS-PL86 | Medium - Suitable for 32A, 415V 3-phase + earthing |
| LS-PL87 | Large - Suitable for 415V 3-phase + zero line + earthing |


LS-PL85



LS-PL86



LS-PL87

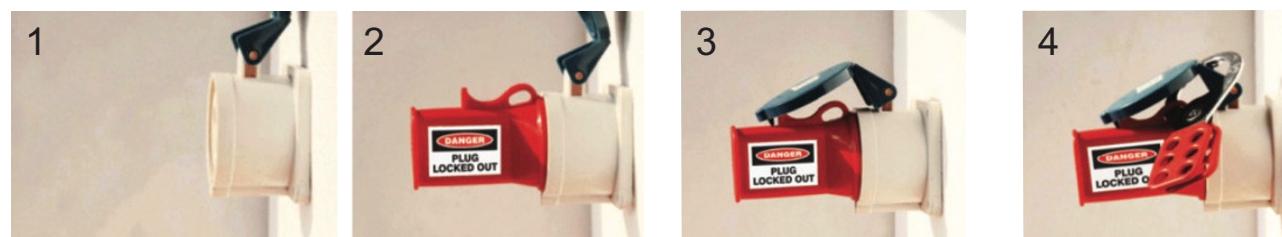

Cylinder Lockout

- Material :** Polypropylene
- Ready for use, doesn't require extra tool for installation.
- Locking holes :** 2 numbers.
- Accepts shackle maximum up to : 9mm
- Weight :** 62.5gm
- Advantage:**
 - Designed to fit easily around 25mm to 63.5mm gas cylinder knob to lockout storage tanks on forklifts.
 - Extremely rugged for superior impact and chemical resistance
 - It is long-lasting and easy to use.
 - Withstands temperatures ranging from -40 °F to 212 °F



LS-PL88



3 in 1 Cylinder Lockout

- Material :** Poly Propylene with printed label of "DANGER" for identification
- Accepts shackle maximum up to : 9mm
- Locking holes:** 1 numbers.
- Weight:** 112gm
- Body measure :**
 - Outer diameter : above 87mm, lower 83mm,
 - Complete length with cover : 160 mm,
 - Can lockout equipment of **size** : 3.3" width x 6" Length.
 - Cover circular dia : 34.3mm
- Suitable for 0.8cm to 4.5cm valves.
- Device is super strong, insulating, anti-soluble, anti-fracture with wear resistance to cracking and abrasion.
- Ability to require multiple authorizations for operation of a locked-out main gas cylinder knob and prevents unauthorized operation.
- Lockout devices are made from high-quality recycled materials, and meet or exceed OSHA regulations.
- Durable construction is designed to withstand the rigors of an industrial environment.



LS-PL89



Pneumatic Lockout

- Material :** ABS
- Locking holes:** 2 number each sides
- Accepts shackle maximum up to : 8mm
- Sizes : 11.70mm (C Type), 12.50mm (D Type), 15.50mm (E Type) and 20.40mm (Middle)
- Can isolate pneumatic power without installing a direct interlocking valve.
- Cost reducing, more convenient.
- The lock can be connected with an external thread coupler to realize isolation of the equipment from all compressed air sources.
- The centre hole of the lock can be used to store an air hose permanently.
- The side ring can be used to hang the hose and the lock.
- Can use a padlock with a shackle diameter of 6.4mm or 7.1mm for lockout purpose.

LS-PL90



| Item Code | Description | Weight |
|-----------|-------------------|--------|
| LS-PL90 | Pneumatic lockout | 23 gm |


Metallic Pneumatic lockout

- Prevent a gas source joint from reconnecting with a high pressure source,
- Suitable for almost all gas source male joints in factories; made of steel; corrosion-resistant.
- Dimensions: 3 Width 35mm×Length 196mm×Thickness 3mm.
- **Weight :** 69gm
- Matchable with all safety padlocks and safety hasps; used together with hasps; suitable for
- use by multiple workers to perform lockout concurrently.
- Suitable for 0.8cm-4.5cm valves.

| Item Code | Description | Weight |
|-----------|----------------------------|--------|
| LS-PL91 | Metallic Pneumatic Lockout | 23 gm |



LS-PL91

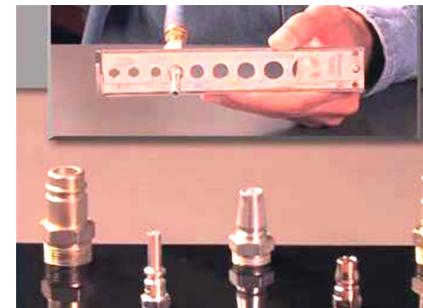

UNIVERSAL Dual Large Plug Chord / PNEUMATIC lockout Devices

- **Material :** Poly Propylene
- **Holes for chord :** One hole of different diameter on both sides with 11 holes at size : Outer size 116 mm and length 246 mm
- **Inner Size :** Length - 240 mm x width 110 mm
- **Color :** Red or any color make as per the quantity.
- **Weight :** 348.5 gms

| Item Code | Description | Weight |
|-----------|---|---------|
| LS-PL92 | UNIVERSAL Dual Large Plug Chord / PNEUMATIC lockout Devices | 348.5GM |



LS-PL92



Electrical - Pneumatic Lock Out Tag Out Kit



| Item Code | Description | Qty |
|-----------|---|-------|
| LS-PB89 | Lockout/Tagout tool Bag | 1 Nos |
| LS-LC44 | Jacket padlock with Long shackle | 3 Nos |
| LS-H24 | SMALL Lockout HASP + Vinyl moulded | 2 Nos |
| LS-H25 | SMALL Lockout HASP + Vinyl moulded | 2 Nos |
| LS-H66 | De-electric lockout hasp with slider operator 6mm | 1 Nos |
| LS-H67 | De-electric lockout hasp with slider operator 3mm | 1 Nos |
| LS-H71 | Non-conductive nylon plastic lockout 12 holes | 1 Nos |
| LS-T46 | DANGER Do not operate Lockout Tag | 1 Set |
| LS-T92 | Permanent marker pen with eraser | 1 Nos |
| LS-T93 | Cable Tie | 1 Set |
| LS-PL84 | Hanging plug and hoist lockout cover | 1 Nos |
| LS-PL91 | Metallic Pneumatic (Air source) lockout | 1 Nos |
| LS-PL78 | Small Plug Lockout | 1 Nos |
| LS-PL79 | Medium Multi - Plug Lockout Device | 1 Nos |
| LS-PL80 | 3 in 1 electrical plug Lockout | 1 Nos |
| LS-EP66 | Mushroom push-button switch Lockout | 1 Nos |
| LS-PL89 | 3 in 1 Cylinder Lockout | 1 Nos |
| LS-C40 | Metallic multiuse cable lockout | 1 Nos |



LS-K54

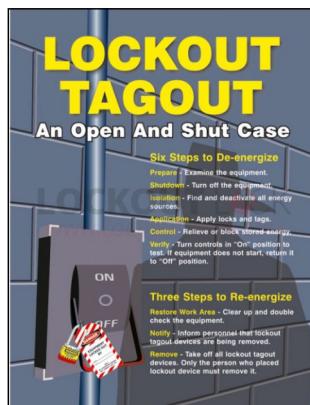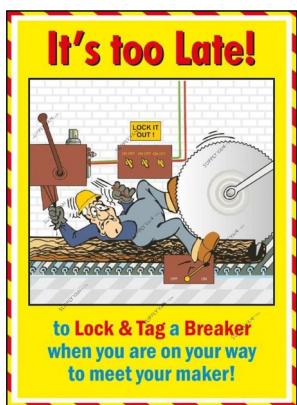

Lockout/Tagout Storage Bag - Waist Pouch

- **Material :** Super high quality fabric.
- **Size of Middle Pocket :** Length – 175 mm, Height – 120 mm, Depth – Size of Side Pocket – Length – 110 mm, Height : 120 mm
- Size of Full Size Pocket – Length – 345 mm,
- **Height :** 18 mm, Depth – 130 mm
- 3 Pockets in Front
- 1 big pocket in Back
- 2 waist attachment strips (connect with belts)
- Additional feature of belt to put it on waist and also can carry it on shoulder as shown in image.
- **Color :** Blue, Red, Black or as per quantity required.
- **Weight :** 268.5gm



LS-PB93

Lockout/Tagout Storage Bag - Waist Pouch

- **Material :** Super high quality fabric.
- Lockout/Tagout Storage Bag
- 1 big middle pocket and 1 small pocket front side
- 2 pockets slot inside
- 2 strips for carry (connect with belts)
- **Color :** Blue, Red, Black or as per quantity required.'
- **Weight :** 689gm



LS-PB94

Lockout Tagout Station / Box / Centres / Cabinets

GROUP LOCKOUT BOX

A compact RED / YELLOW / GREY powder coated MS lock box used for the storage of keys and other machine activation devices. Once a machine has been isolated and made safe, the keys are placed in the lock box, each authorised person working on the machine then applies their own padlock to the box, ensuring the key can not be accessed until every authorised user is satisfied that the machine is safe to operate.



7" (L) 4" (W) 6" (H)
8 Holes
LS-G8



10" (L) 4" (W) 6" (H)
16 Holes
LS-G12



10" (L) 4" (W) 6" (H)
16 Holes
LS-G17



7 Holes
LS-G20



12 Holes
LS-G21



26 Holes
LS-G22




12 Holes
LS-G23



12.5" (L) 3" (W) 18.75" (H)
12 Holes
LS-G18



STATION PADLOCK
LOCKOUT
5.5" (L) 3.15" (W)
1.57 (Bended Length)
Suitable for 5 Lock
LS-G24



LOCKOUT
PADLOCK STATION
10.6" (L) 3.15" (W)
1.57 (Bended Length)
Suitable for 10 Lock
LS-G27



LOCKOUT
PADLOCK STATION
15.75" (L) 3.15" (W)
1.57 (Bended Length)
Suitable for 15 Lock
LS-G28

GROUP LOCKOUT KEY / DOCUMENTATION BOX

- MS + Powder coated,
- 22 gauge MS Sheet for small box parts, 20 gauge MS Sheet of tray at the back
- Number of boxes / colour of backside tray & small boxes can be CUSTOMIZED as per requirement.
- Individual small box is available with 1 / 4 / 5 hole options.



LS-G33



LS-G35



LS-G43




LS-G37




LS-G41




LS-G45

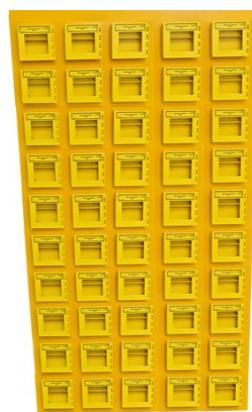

LS-G51



LS-G47



LS-G49




6" (L) 2" (W) 6" (H)
4 Holes
LS-G4



7.5" (L) 2" (W) 6" (H)
5 Holes
LS-G6

LOCKOUT KEY BOX HOLDER / CABINET

- MS + Powder coated, Acrylic Front clear fascia
- Number of boxes / colour of small boxes can be CUSTOMIZED as per requirement.
- Individual small box is available with 5 locks, & each lock contain 2 keys
- Knob at the door for easy operation.
- Cut slot on the door : 1.77"



LS-G30



LS-G31

GROUP LOCKOUT BOX PORTABLE 16 HOLES

- **LS-G54** : Large Group Lockout Box – 16 holes with Transparent Fascia for view of the item who inside the box. A compact RED / YELLOW / GREY powder coated MS lock box used for the storage of keys and other machine activation devices.
- **Size** - width 255mm height 150mm depth 105mm
- **Weight** - 1.6 kg
- Once a machine has been isolated and made safe, the keys are placed in the lock box, each authorised person working on themachine then applies their own padlock to the box, ensuring the key can not be accessed until every authorised user is satisfied thatthe machine is safe to operate.



LS-G54

Work Permit Box


- **Product Dimensions** : 22.5 x 7.5 x 22.5 inches
- **Color** : Grey
- **Material** : HDPE Recyclable Plastic
- **Item Weight** : 12 pounds
- Mounts on Post and Post Spike System or 2x4 post
- Designed for posting permits, SWPPP materials, folded plans, notices, and builder supply delivery receipts.
- **Usage** : Any location permits or other construction materials need to be posted or stored.



LS-G33

Open Lockout Tagout Station (Wall Mounted)


- 3mm ACP sheet
- OPEN Stations are CUSTOMIZED, hence we can also prepare as per requirement and usage.
- Colour of LOTO material with station can vary as per stock availability.

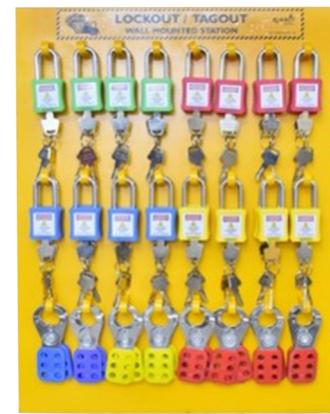

12" (W) 12" (H)
LS-O45



11" (W) 20" (H)
LS-O49



21" (W) 20" (H)
LS-O54



18" (W) 23" (H)
LS-O80



12" (W) 11" (H)
LS-O76



12" (W) 18" (H)
LS-O58



16" (W) 15" (H)
LS-O72



16" (W) 21" (H)
LS-O62



21" (W) 17.5" (H)
LS-O67

SHADOW BOARD LOCKOUT SYSTEM


Shadow Board is a visual representation of a tool board that houses lockout tagout devices on your premises. It can be personalised with graphics/visual indications that pin-point where exactly the device should be when not in use and in include custom messages, transparent pockets for instructions, and relevant artwork.

• BENEFITS OF USING A SHADOW BOARD SYSTEM

- Systematic Storage of Lockout Tagout Devices, Improved Productivity
- Easy Traceability, Enhanced Accountability
- Effective Visual Solutions, Maximised Space Utilisation.



10" (W) 15.4" (H)
LS-O84

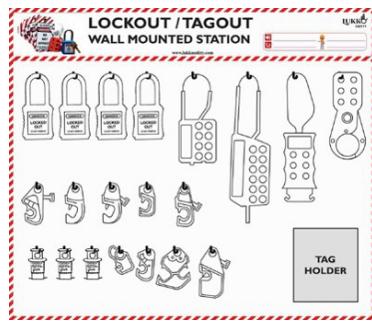

(H) 17" X (W) 20"
LS-O63



12" (W) 20.5" (H)
LS-O88



22.3" (W) 20.5" (H)
LS-O92

Lockout Tagout Station / Box / Centres / Cabinets

Compact  powder coated Lock box suitable for wall fixing or use as a mobile unit. Available with hooks / interior racks / movable shelves, transparent window / clear fascia / fully closed door, Handle at the top to carry the box, One knob and one lock with two keys on the door. Used for the Storage of Padlocks, Keys and Lockout products.




8" (W) 10" (H)
LS-S31



With removable
tray inside and latch in fr
LS-G33



15.5" (L) 2" (W) 18" (H)
LS-S35



15.5" (L) 2" (W) 18" (H)
LS-S39



14" (L) 6" (W) 16" (H)
LS-S42



14" (L) 6" (W) 16" (H)
LS-S43



14" (L) 6" (W) 16" (H)
LS-S43



14" (L) 6" (W) 16" (H)
LS-S42



14" (L) 6" (W) 16" (H)
LS-S44



15" (L) 9" (W) 30" (H)
LS-S40



15" (L) 9" (W) 30" (H)
LS-S41



15" (L) 6" (W) 18" (H)
LS-S45



5" (L) 1.75" (W) 6" (H)
LS-S46

Lockout Tagout Station / Box / Centres / Cabinets

Compact  powder coated Lock box suitable for wall fixing or use as a mobile unit. Available with hooks / interior racks / movable shelves, transparent window / clear fascia / fully closed door, Handle at the top to carry the box, One knob and one lock with two keys on the door. Used for the Storage of Padlocks, Keys and Lockout products.



LS-S47



LS-S48



LS-S49



LS-S54




LS-S52



LS-S50



LS-S55



LS-S51



Lockout Tagout Kits

Our Lockout Tagout Kits to provide the adaptability needed by the modern day electrician, groups, departments and safety managers in compliance with OSHA regulations. Ideal to ensure an energy source remains locked out in OFF condition while servicing, maintenance or cleaning activities is being performed. Suitable for multi-purpose operation would suit technicians that are working remotely on the sites / plants.



LS-K34S



LS-K36S



LS-K39S



LS-K43B



LS-K45



LS-K50



LS-K53



LS-S38



LS-G9



LS-G16



LS-046



LS-051



LS-055



LS-059



LS-064



LS-BR51




LS-BR55



LS-074



LS-079



LS-082



LS-086



LS-090



LS-0101



LS-S32



LS-S34

DOJO BOARD (WITH MATERIALS)

Material – Mild Steel with duly phosphate powder coated

There is 4 key hole on back side of base plate and can fix on wall .

Outer size – 72x48 inch

Display material Made of multimedia pre adhesive vinyl pasted on thick ACP sheet (3 mm).

All loto accessories hang metal j hook as shown on the picture

Product Name also under display loto product name will we there

Language as per your requirement Hindi or English.

PACKING

One part : Base plate with all fitting marked with labels and display matter Second part :

having all loto accessories which to be hanged on specific position at your end as per image .

It is modular pattern and easy to carry and install any where

LS-DOJO BOARD with base and loto accessories to meet

OSHA STANDARD REQUIREMENT.

we can make customized size



LS-DOJO BOARD

DOJO BOARD (WITH MATERIALS & NON-MOVABLE STAND)

Material – Mild Steel with duly phosphate powder coated

There is 4 key hole on back side of base plate and can fix on wall .

Outer size – 72x48 inch

Stand – Vertical display Legs made from heavy duty mild steel pipe duly powder

coated with moveable heavy

wheel with locking stopper arrangement.

Display material Made of multimedia pre adhesive vinyl pasted on thick ACP sheet (3 mm).

All loto accessories hang metal j hook as shown on the picture

Product Name also under display loto product name will we there

Language as per your requirement Hindi or English.

PACKING

One part : Base plate with all fitting marked with labels and display matter Second part :

having all loto accessories which to be hanged on specific position at your end as per image .

It is modular pattern and easy to carry and install any where

LS-DOJO BOARD with base and loto accessories to meet

OSHA STANDARD REQUIREMENT.

we can make customized size.



LS-DB-STAND

Founded in April of 2018 and based in Gurugram, Haryana LUKKO SAFETY IMPEX PVT. LTD. is a trusted MANUFACTURER Supplier / Exporter of standard – **LOCKOUT TAGOUT** and **INDUSTRIAL SAFETY PRODUCTS** with LOTO methodology guidance, applicable in numerous industries to prevent unsafe acts / accidents / conditions occur due to technical causes or human fault at workplace by providing awareness.

Organization follows **ISO 9001:2015** quality management system that aims to provide customized LOTO safety products that are **CE CERTIFIED** to meet high safety, health, and environmental protection requirements and designed to enhance workplace safety through the effective implementation.

Following global **OSHA standard** 29 CFR 1910.147 of **LOCKOUT/TAGOUT** for the control of hazardous energy by disabling machineries or equipment while employee perform servicing, maintenance or cleaning activities.

Hazardous energy as Electrical, Mechanical, Hydraulic, pneumatic, chemical, thermal and other stored energy and sources.

Providing instant online support and expert advice allows affected or authorized employee to remove common mistakes and to ensure requirements are being met as per OSHA standard.

Production unit contain equipments like Injection Moulding machine, Power Press, Drill Machine and Hand Moulding machine etc.

WHAT MAKES OUR COMPANY SPECIAL?

- Growing company with a team of experienced professionals having demonstrated history of experience in INDUSTRIAL SAFETY over 10+ years.
- OUR TEAM- We are blessed with a dedicated & hard-working team of people who work as their priority & work diligently to meet the requirements of the customers. We have a good team of professionals working round the clock to provide best products and services to the customers
- Manufacturing high quality innovative LOTO products that are customized and providing warranty against any manufacturing defect.
- On site safety inspection, consultation, demonstration and submit presentation as per the particular site requirements.
- On the spot ready to resolve implementation related queries online to achieve optimum results.

WHY US

A fact to be accepted is that there are a lot of market players In the Lock Out Tag Out products, there are certain factors that keep us much ahead of competition, these facts are mentioned below:

- Superior quality
- Value for money
- Within time deliveries

The expertise & experience of "**Mr. Ganga Prasad Rankawat**", in this business domain is unmatched. His motivational guidance equips us to deal with the evolving client needs with utmost professionalism.

Addressing the challenges faced by our global community today require persistence, creativity and a child-like curiosity.

We're on it.

WHAT ARE OUR CORE VALUES?

- Products are environment friendly and pollution free with no hazardous substances.
- Manufacturing standards: Assurance trained technicians to ensure consistency and produce high quality certified LOTO products.

By

Founder

LUKKO SAFETY IMPEX PVT. LTD.

Ganga Prasad Rankawat



ISO 9001: 2015 Certified

LUKKO SAFETY IMPEX PVT. LTD.

Lukko House, IInd Mile Stone,
Opposite Haryana Soap Factory,
Basai Road, Gurugram - 122001 (Haryana), INDIA

91 9290747474, 9818499924

9808HR2018PTC072756

06AACL5326J1ZI

Info@lukkosafety.com, sales@lukkosafety.com

FOR MORE INFORMATION & LOTO SAFETY
SOLUTIONS, VISIT;

WWW.LUKKOSAFETY.COM

